
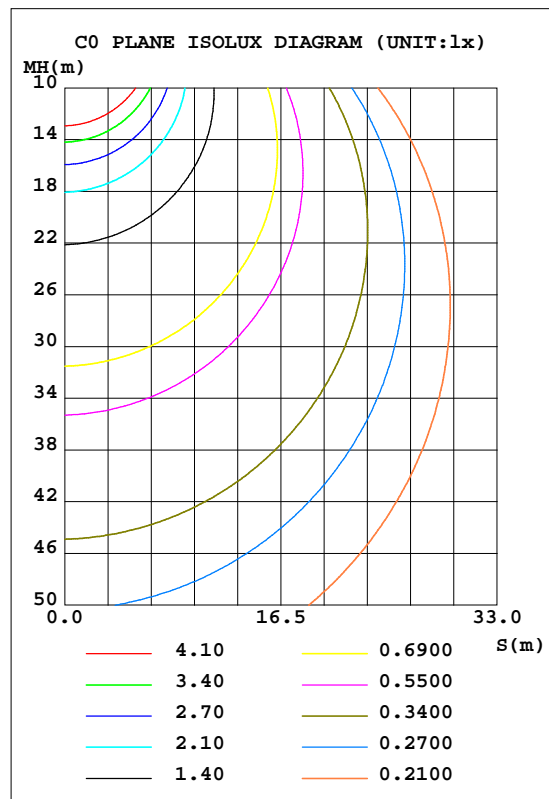


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 155.34 lm/W			
MODEL		I _{max} (cd)	687.2	S/MH(C0/180)	1.38
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2845.3	h UP, DN(C0-180)	8.5,41.1
NOMINAL FLUX(lm)	2845.34	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	8.6,41.8
LAMPS INSIDE	1	h up(%)	17.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	230	h down(%)	82.9	CIBSE SHR MAX	1.50

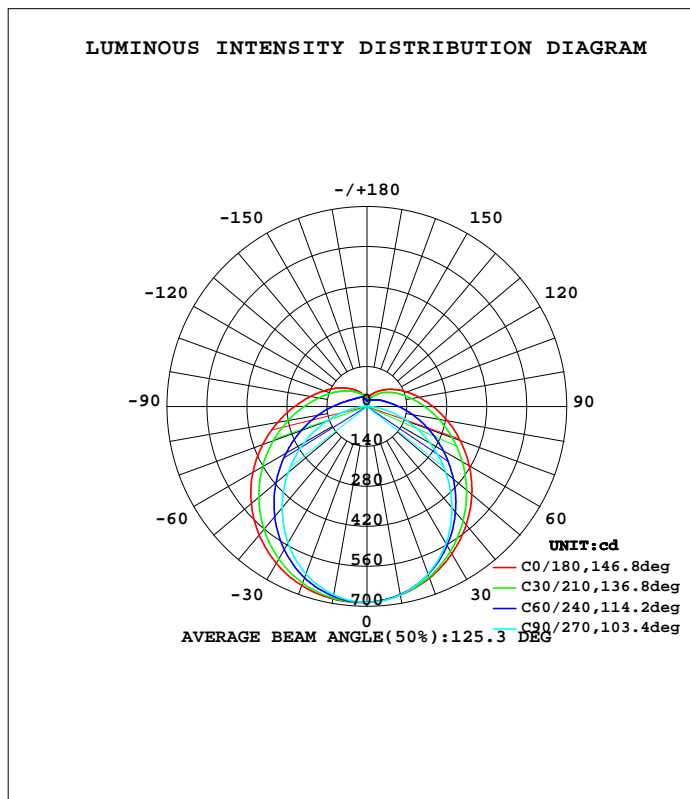

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	670.5	669.6	670.2	678.0	684.5	678.2	669.8	669.2	0- 10	64.88	64.88	2.28,2.28
20	639.7	631.0	624.7	648.2	667.4	648.4	624.2	630.8	10- 20	186.1	251.0	8.82,8.82
30	595.1	573.6	553.7	597.6	634.2	598.1	552.9	572.8	20- 30	283.2	534.2	18.8,18.8
40	540.8	502.9	463.0	531.3	587.4	531.9	462.4	502.0	30- 40	345.5	879.7	30.9,30.9
50	479.4	425.3	361.1	454.7	528.9	455.3	360.6	423.9	40- 50	368.6	1248	43.9,43.9
60	413.5	346.5	254.6	373.8	461.3	374.9	254.3	345.1	50- 60	354.9	1603	56.3,56.3
70	347.4	272.6	149.9	295.2	388.6	296.4	150.0	270.7	60- 70	312.1	1915	67.3,67.3
80	285.7	208.2	56.68	225.3	317.1	226.7	56.49	206.0	70- 80	252.3	2168	76.2,76.2
90	231.5	157.2	4.151	169.2	254.2	170.5	4.011	155.0	80- 90	190.8	2358	82.9,82.9
100	186.4	119.8	5.115	128.4	202.6	129.7	4.918	117.9	90-100	144.0	2502	88,88
110	149.3	93.37	6.299	99.95	161.4	101.1	6.274	91.40	100-110	109.0	2611	91.8,91.8
120	118.8	73.17	7.572	80.03	128.6	80.87	7.390	71.15	110-120	81.12	2693	94.6,94.6
130	94.03	57.91	8.838	65.58	101.8	66.12	8.625	55.25	120-130	58.70	2751	96.7,96.7
140	73.42	43.65	10.07	54.91	79.66	55.16	9.856	41.98	130-140	40.94	2792	98.1,98.1
150	57.14	34.12	11.20	46.71	61.86	46.91	11.04	32.83	140-150	26.84	2819	99.1,99.1
160	45.05	27.58	12.17	37.78	45.63	37.57	12.09	26.84	150-160	16.26	2835	99.6,99.6
170	28.37	23.20	12.93	27.85	27.22	27.93	12.89	22.94	160-170	8.021	2843	99.9,99.9
180	13.94	13.36	13.29	13.33	13.91	13.36	13.29	13.33	170-180	1.988	2845	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.10	1.10	1.10	1.02	1.02	1.02	.94	.94	.94	.86	.86	.86	.83
1.0	.97	.91	.87	.93	.88	.84	.85	.81	.78	.78	.75	.72	.72	.70	.67	.64
2.0	.83	.75	.69	.79	.73	.67	.73	.67	.62	.67	.63	.58	.62	.58	.55	.51
3.0	.72	.63	.56	.69	.61	.55	.64	.57	.51	.59	.53	.48	.54	.49	.45	.42
4.0	.63	.54	.47	.61	.52	.46	.56	.49	.43	.52	.46	.41	.48	.43	.39	.36
5.0	.56	.47	.40	.54	.46	.39	.50	.43	.37	.46	.40	.35	.43	.37	.33	.31
6.0	.51	.41	.35	.49	.40	.34	.45	.38	.32	.42	.35	.31	.39	.33	.29	.27
7.0	.46	.37	.30	.44	.36	.30	.41	.34	.28	.38	.32	.27	.35	.30	.26	.23
8.0	.42	.33	.27	.40	.32	.26	.37	.30	.25	.35	.29	.24	.32	.27	.23	.21
9.0	.38	.30	.24	.37	.29	.24	.34	.27	.23	.32	.26	.22	.30	.25	.21	.19
10.0	.35	.27	.22	.34	.26	.21	.32	.25	.20	.30	.24	.20	.28	.22	.19	.17

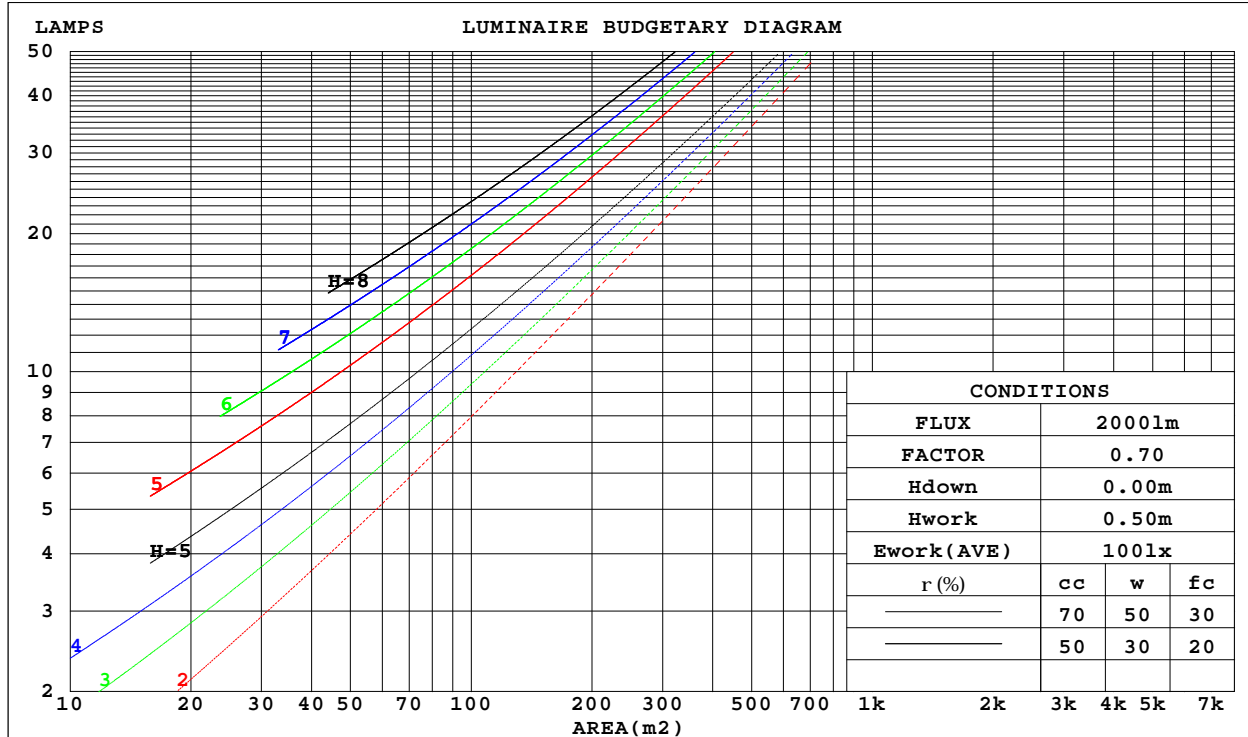

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.372	.212	.067	.360	.205	.065	.336	.193	.062	.315	.182	.058	.295	.171	.055	
2.0	.325	.178	.055	.314	.173	.053	.293	.163	.051	.273	.153	.048	.255	.144	.046	
3.0	.290	.154	.046	.280	.150	.045	.261	.141	.043	.243	.133	.041	.227	.126	.039	
4.0	.262	.136	.040	.253	.132	.039	.236	.125	.037	.220	.118	.036	.205	.111	.034	
5.0	.239	.122	.035	.230	.118	.034	.215	.112	.033	.200	.106	.031	.187	.100	.030	
6.0	.219	.110	.031	.212	.107	.031	.197	.101	.029	.184	.096	.028	.172	.090	.027	
7.0	.202	.100	.028	.196	.097	.028	.183	.092	.027	.170	.087	.025	.159	.083	.024	
8.0	.188	.092	.026	.182	.089	.025	.170	.085	.024	.159	.080	.023	.148	.076	.022	
9.0	.175	.085	.024	.170	.083	.023	.159	.078	.022	.148	.074	.021	.139	.070	.020	
10.0	.164	.079	.022	.159	.077	.021	.149	.073	.021	.139	.069	.020	.130	.065	.019	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.321	.321	.321	.274	.274	.274	.187	.187	.187	.108	.108	.108	.034	.034	.034	
1.0	.316	.287	.261	.270	.246	.225	.185	.169	.155	.106	.098	.090	.034	.032	.029	
2.0	.309	.264	.226	.265	.227	.196	.181	.157	.136	.105	.091	.080	.034	.030	.026	
3.0	.301	.247	.205	.258	.213	.177	.177	.148	.124	.102	.087	.073	.033	.028	.024	
4.0	.294	.235	.190	.252	.203	.165	.173	.141	.116	.100	.083	.069	.032	.027	.023	
5.0	.286	.225	.180	.246	.195	.157	.169	.136	.111	.098	.080	.066	.032	.026	.022	
6.0	.279	.217	.173	.239	.188	.151	.165	.132	.107	.096	.077	.063	.031	.025	.021	
7.0	.272	.210	.168	.234	.182	.146	.161	.128	.103	.094	.075	.062	.030	.025	.020	
8.0	.265	.205	.164	.228	.178	.143	.158	.125	.101	.092	.074	.060	.030	.024	.020	
9.0	.259	.200	.160	.223	.174	.140	.154	.122	.099	.090	.072	.059	.029	.024	.020	
10.0	.253	.196	.158	.218	.170	.138	.151	.120	.098	.088	.071	.058	.029	.023	.019	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm										
NAME: LED					TYPE:			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.7	22.8	24.1	24.7	20.4	21.8	20.9	22.3	22.8
3H	24.8	26.0	25.3	26.5	27.1	21.9	23.1	22.4	23.7	24.2
4H	26.1	27.3	26.7	27.9	28.5	22.4	23.6	23.0	24.2	24.8
6H	27.6	28.8	28.2	29.3	29.9	22.8	24.0	23.4	24.5	25.2
8H	28.5	29.6	29.0	30.1	30.8	23.0	24.0	23.5	24.6	25.3
12H	29.4	30.5	30.0	31.1	31.7	23.0	24.1	23.6	24.6	25.3
4H 2H	22.8	24.0	23.4	24.6	25.2	21.5	22.7	22.0	23.2	23.8
3H	25.6	26.6	26.1	27.2	27.8	23.2	24.2	23.8	24.8	25.5
4H	27.1	28.1	27.7	28.7	29.4	24.0	24.9	24.6	25.5	26.2
6H	28.8	29.7	29.5	30.3	31.1	24.6	25.4	25.2	26.1	26.8
8H	29.8	30.6	30.5	31.2	32.0	24.8	25.6	25.5	26.3	27.0
12H	30.9	31.7	31.6	32.3	33.1	25.0	25.7	25.6	26.4	27.1
8H 4H	27.5	28.3	28.1	28.9	29.6	24.9	25.7	25.6	26.4	27.1
6H	29.5	30.2	30.2	30.8	31.6	25.9	26.6	26.6	27.3	28.1
8H	30.7	31.3	31.4	32.0	32.8	26.4	27.0	27.1	27.7	28.5
12H	32.0	32.6	32.7	33.3	34.1	26.8	27.3	27.5	28.0	28.8
12H 4H	27.5	28.2	28.1	28.9	29.6	25.2	26.0	25.9	26.6	27.4
6H	29.6	30.2	30.3	30.9	31.7	26.5	27.1	27.2	27.8	28.6
8H	30.9	31.4	31.6	32.1	33.0	27.1	27.6	27.8	28.3	29.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 2845 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	49	37	30	48	36	29	46	36	29	22
0.80	58	46	38	57	45	37	54	43	36	29
1.00	66	53	45	64	52	45	61	53	44	35
1.25	73	61	52	71	59	52	66	57	50	40
1.50	78	66	58	75	65	57	71	62	55	45
2.00	85	75	67	82	72	65	77	69	62	51
2.50	90	80	72	86	77	70	80	73	67	55
3.00	93	84	77	90	82	75	83	77	71	58
4.00	98	90	84	94	87	81	87	81	77	63
5.00	101	94	88	97	91	86	89	85	80	66
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Conical surface Flux(90deg):

1063.6 lm
%lum = 37.4%
%lamp = 37.4%

Conical surface Flux(120deg):

1603.3 lm
%lum = 56.3%
%lamp = 56.3%

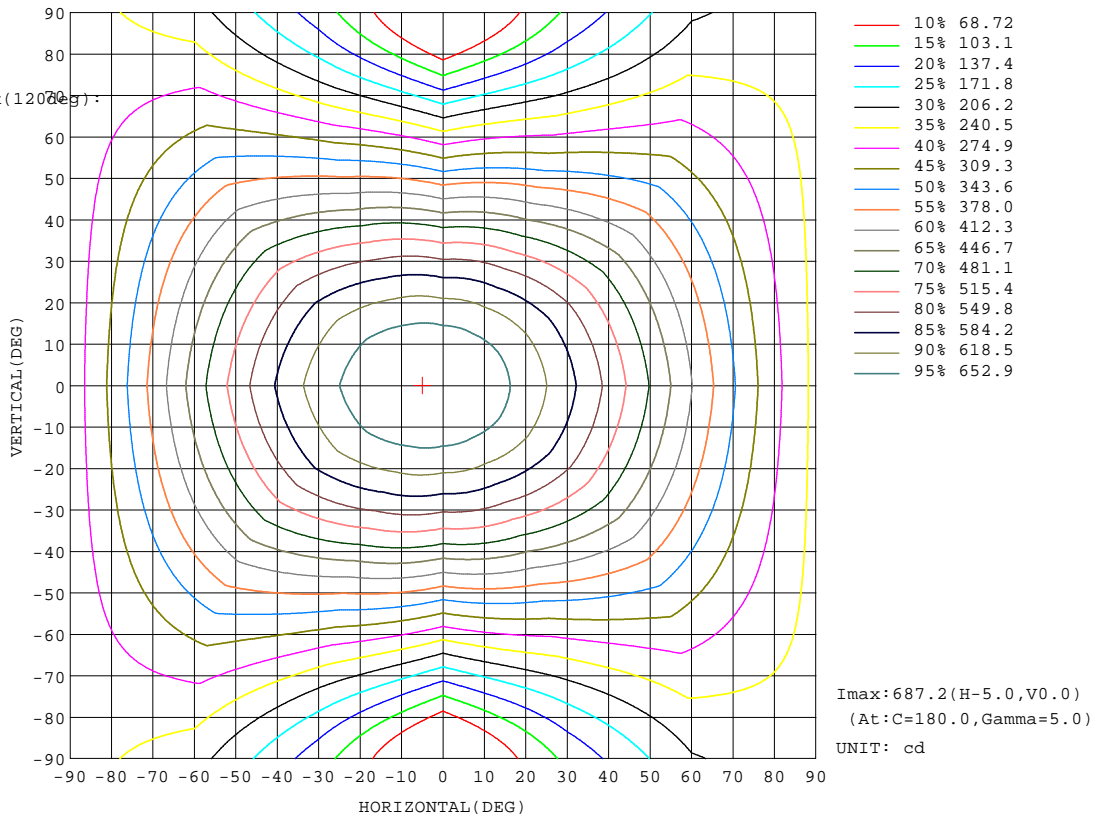


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2017-10-28

Phi Range: 0 - 180DEG
Phi Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:7.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:1702 lm

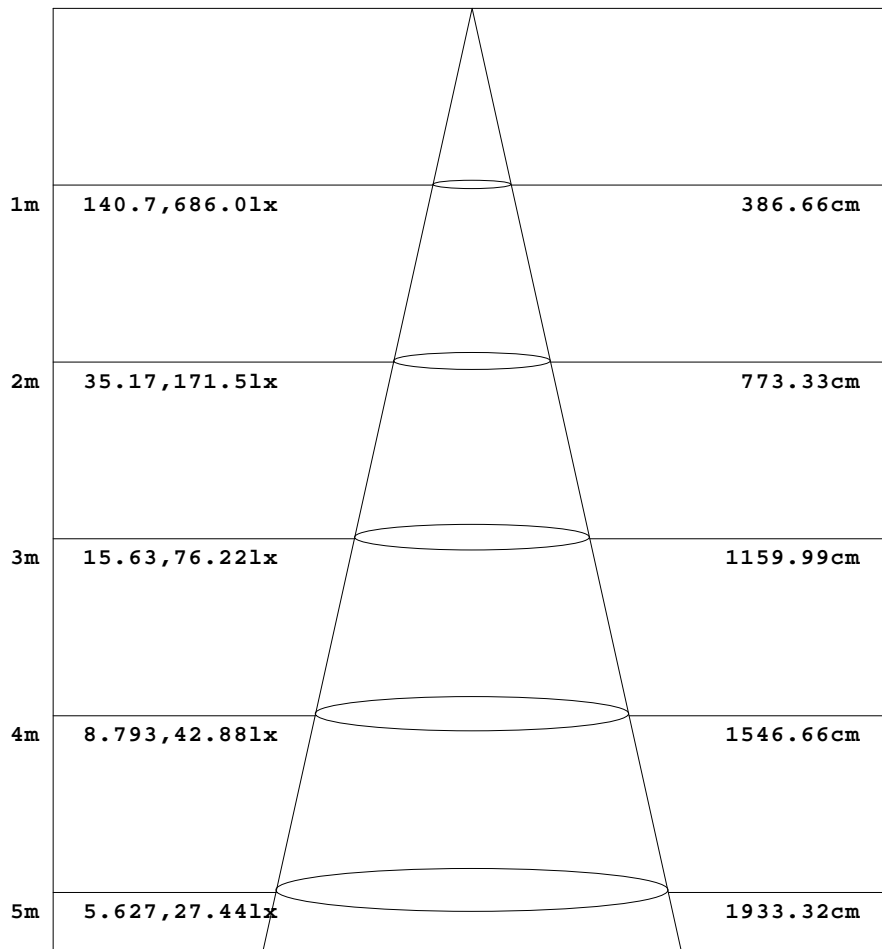

Height Eavg, Emax Angle:125.30deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

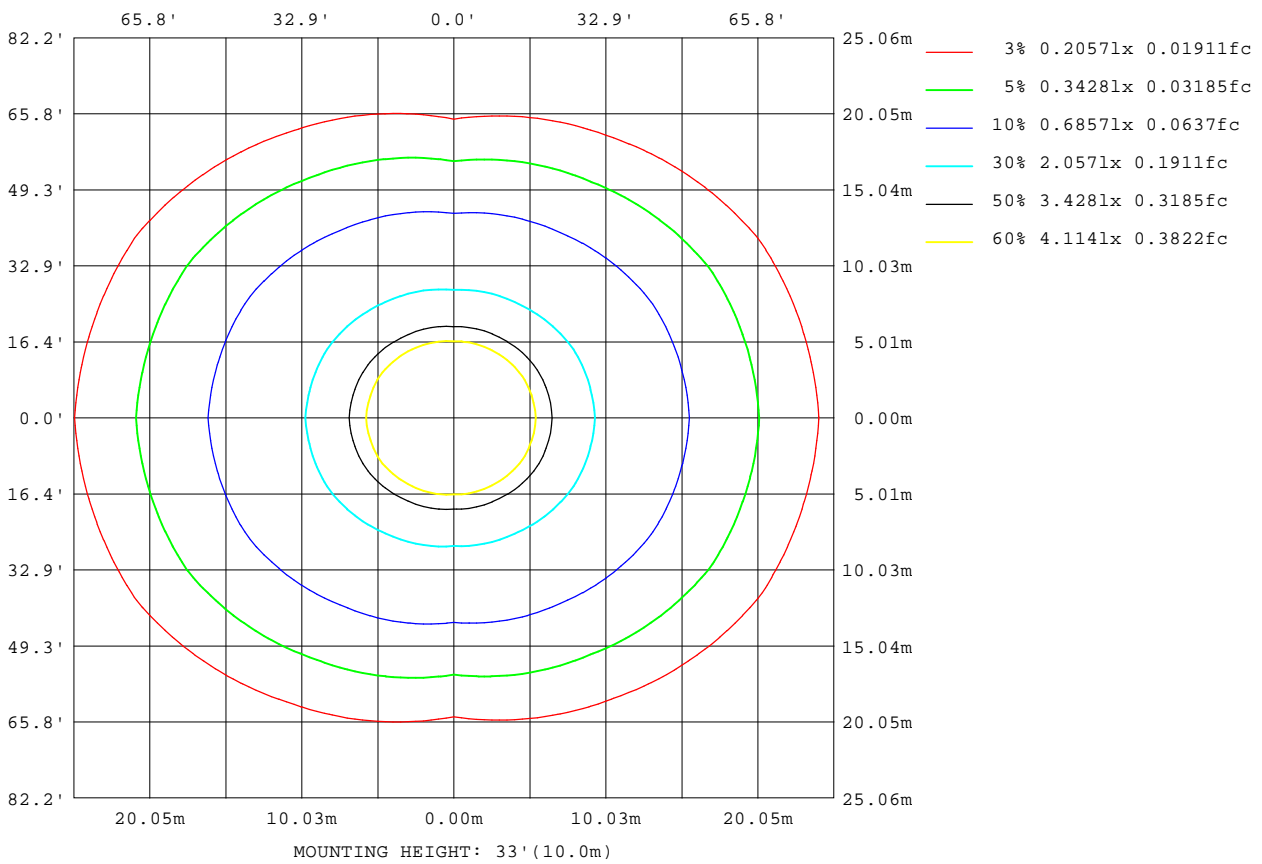

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	23823
L_0~180(75)av	32253
L_0~180(85)av	77705
L_90~270(65)av	11930
L_90~270(75)av	9751
L_90~270(85)av	6132
L_45(65)av	19132
L_45(75)av	24392
L_45(85)av	55370

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks:

Planar Illuminance Curve

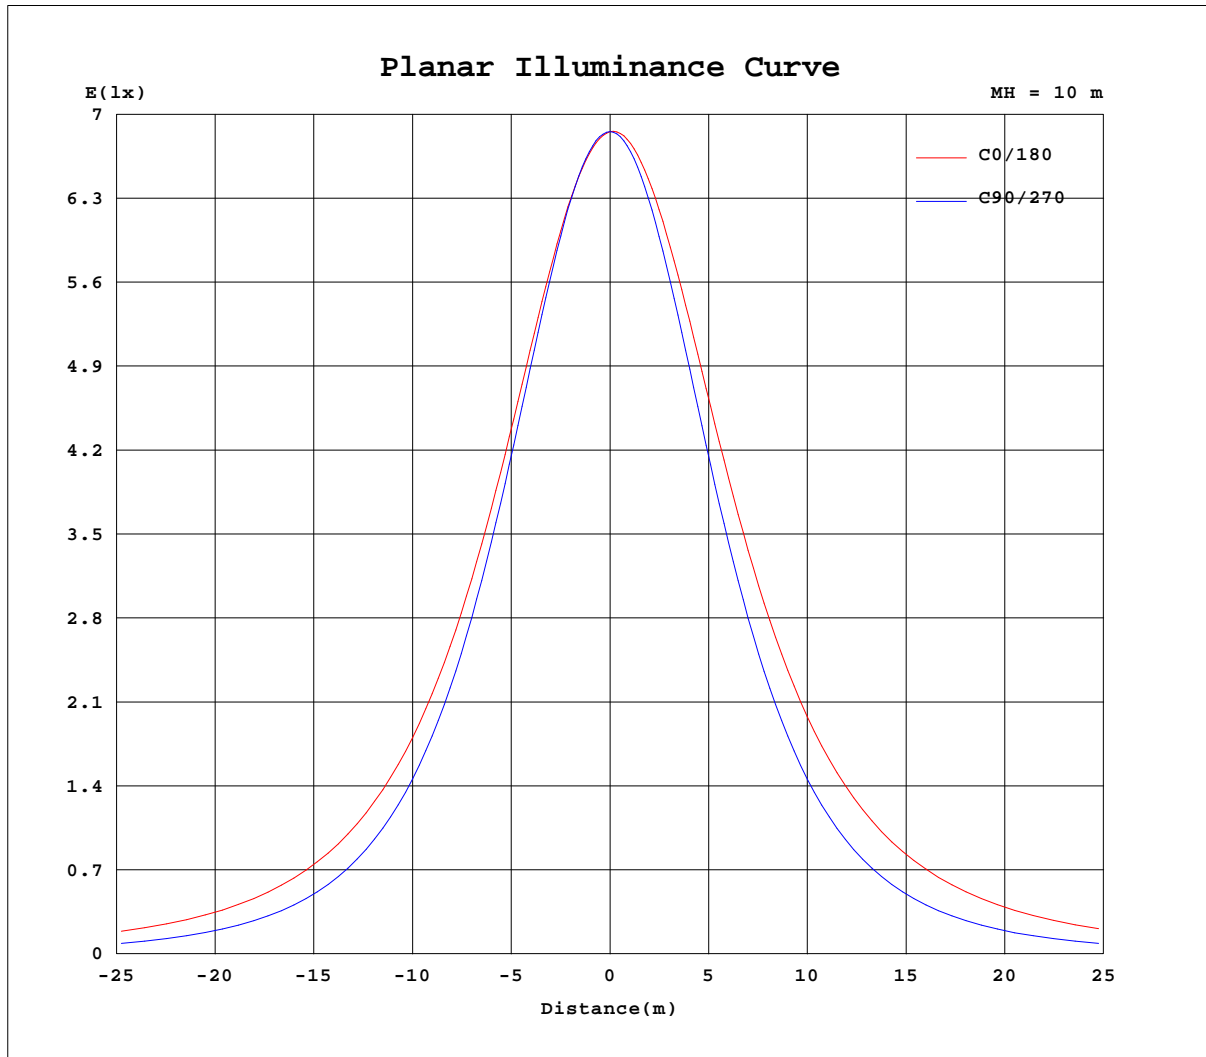

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2017-10-28

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity: 65.0%
 Test Distance: 7.370m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.4V I:0.0835A P:18.32W PF:0.9520 Lamp Flux:2845.34x1 lm		
NAME: LED	TYPE:	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	686	686	686	686	686	686	686	686	686	686	686	686						
5	680	680	680	682	684	686	687	686	684	682	680	680						
10	670	670	669	670	675	681	684	681	675	670	669	670						
15	657	655	650	651	660	672	678	672	660	650	650	655						
20	640	636	626	625	638	658	667	658	639	624	626	635						
25	619	612	596	592	611	640	653	640	611	591	596	612						
30	595	585	562	554	578	617	634	617	579	553	561	584						
35	569	556	524	510	542	591	612	590	543	510	523	554						
40	541	524	482	463	502	561	587	561	503	462	482	522						
45	511	490	439	413	459	529	560	529	460	412	438	488						
50	479	455	395	361	415	495	529	495	416	361	394	454						
55	447	420	351	308	370	459	496	459	372	308	350	418						
60	413	385	308	255	325	422	461	422	328	254	307	383						
65	380	350	267	202	282	385	425	385	285	202	265	349						
70	347	317	228	150	242	349	389	349	244	150	226	315						
75	316	285	193	101	204	313	352	313	207	101	190	283						
80	286	255	161	56.7	171	280	317	280	174	56.5	158	254						
85	257	228	134	21.5	142	248	284	249	145	21.3	131	226						
90	232	203	111	4.15	118	220	254	221	121	4.01	109	201						
95	208	181	93.5	4.56	99.1	195	227	195	101	4.29	90.9	179						
100	186	160	79.4	5.11	84.3	172	203	173	86.2	4.92	77.1	159						
105	167	142	68.4	5.67	72.8	153	181	154	74.6	5.69	66.5	141						
110	149	126	60.3	6.30	64.2	136	161	136	65.7	6.27	57.6	125						
115	133	112	53.2	6.94	57.7	121	144	121	58.9	6.80	50.5	111						
120	119	100.0	46.4	7.57	52.6	107	129	108	53.7	7.39	45.0	97.4						
125	106	86.8	41.3	8.21	48.8	95.7	115	96.3	49.6	8.00	40.2	85.3						
130	94.0	78.2	37.6	8.84	45.9	85.3	102	85.8	46.5	8.63	36.6	73.9						
135	83.4	66.8	34.2	9.46	43.6	76.2	90.1	76.4	44.0	9.24	33.2	65.3						
140	73.4	55.8	31.5	10.1	41.8	68.1	79.7	68.3	42.1	9.86	30.7	53.3						
145	64.8	47.1	29.5	10.7	40.3	61.0	70.3	61.1	40.5	10.5	28.8	45.1						
150	57.1	40.3	27.9	11.2	38.6	54.8	61.9	54.9	38.9	11.0	27.1	38.5						
155	50.5	35.0	25.9	11.7	35.8	49.5	54.5	49.5	36.0	11.6	25.4	33.6						
160	45.1	30.6	24.6	12.2	30.7	44.9	45.6	44.8	30.3	12.1	24.1	29.6						
165	40.2	25.5	24.0	12.6	27.9	39.1	40.9	38.8	28.3	12.5	23.7	25.0						
170	28.4	23.3	23.1	12.9	25.2	30.5	27.2	30.4	25.5	12.9	22.9	22.9						
175	18.8	21.6	20.3	13.2	20.6	24.8	17.9	23.3	21.0	13.2	20.4	21.6						
180	13.9	13.4	13.3	13.3	13.3	13.4	13.9	13.4	13.3	13.3	13.3	13.4						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-10-28

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:7.370m [K=1.0000]
 Remarks: