
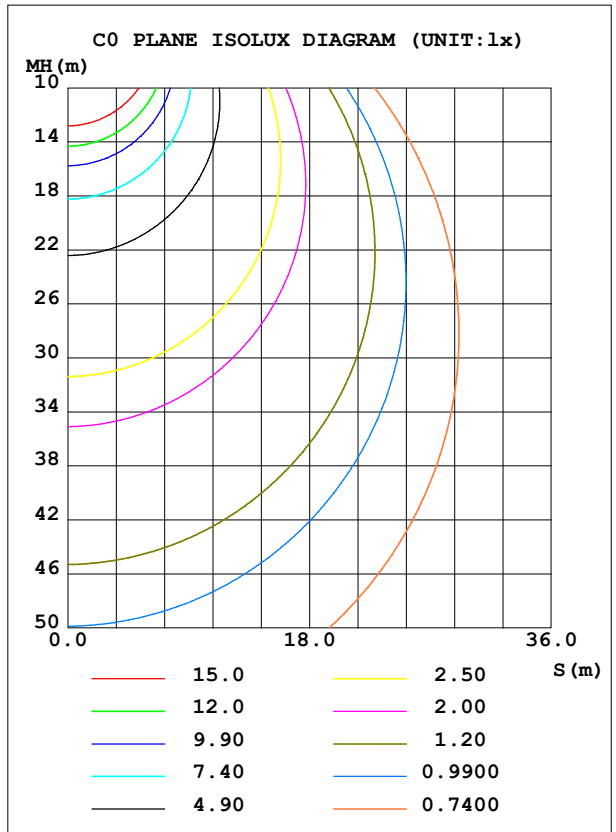


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	T065S3-50P1FP-T1-TL	Imax (cd)	2462	S/MH (C0/180)	1.33
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	8318.6	$\eta$ UP, DN (C0-180)	4.1, 45.0
NOMINAL FLUX (lm)	8318.57	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	4.5, 46.4
LAMPS INSIDE	1	$\eta$ up (%)	8.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	$\eta$ down (%)	91.4	CIBSE SHR MAX	1.35

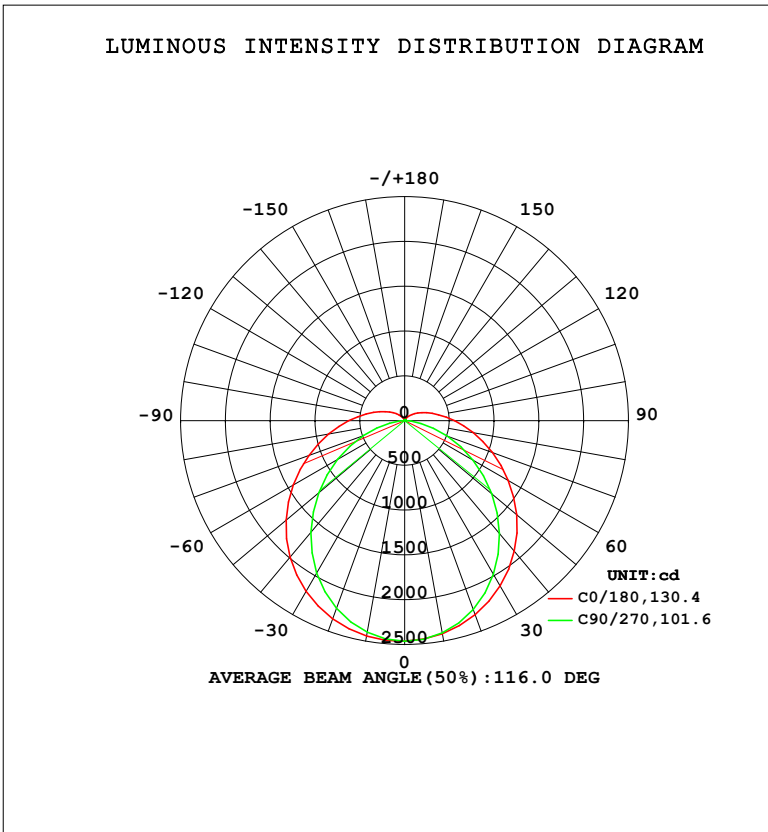

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 2023-10-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System: EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity: 65.0%  
 Test Distance: 12.177m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C90	C180	C270					$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	2416	2408	2441	2400					0- 10	232.8	232.8	2.8,2.8
20	2304	2243	2353	2230					10- 20	665.9	898.7	10.8,10.8
30	2130	1981	2200	1964					20- 30	1007	1905	22.9,22.9
40	1904	1647	1990	1629					30- 40	1212	3118	37.5,37.5
50	1633	1271	1728	1252					40- 50	1263	4380	52.7,52.7
60	1335	881.6	1436	864.0					50- 60	1164	5545	66.7,66.7
70	1042	507.0	1140	490.1					60- 70	952.0	6497	78.1,78.1
80	777.3	185.2	862.6	172.0					70- 80	680.1	7177	86.3,86.3
90	557.9	7.110	627.0	3.607					80- 90	425.8	7603	91.4,91.4
100	387.7	3.377	437.3	3.387					90-100	274.6	7877	94.7,94.7
110	262.6	4.392	296.5	4.483					100-110	184.0	8061	96.9,96.9
120	172.0	5.884	195.9	5.994					110-120	116.8	8178	98.3,98.3
130	110.1	7.449	124.1	7.540					120-130	70.26	8248	99.2,99.2
140	62.82	9.386	69.50	9.030					130-140	38.56	8287	99.6,99.6
150	30.15	10.66	32.26	10.35					140-150	18.23	8305	99.8,99.8
160	18.70	11.66	18.50	11.39					150-160	8.203	8313	99.9,99.9
170	14.23	12.29	13.09	12.10					160-170	3.947	8317	100,100
180	12.23	12.43	12.16	12.42					170-180	1.202	8319	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3752.6 lm

%lum = 45.1%

%lamp = 45.1%

Conical surface Flux(130deg): 6052.6 lm

%lum = 72.8%


%lamp = 72.8%

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

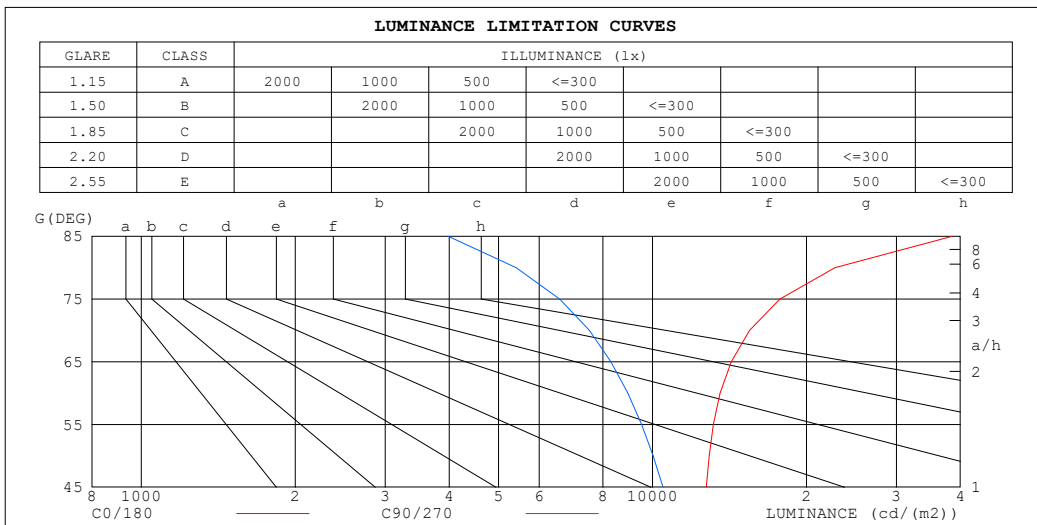

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	38535	3983
80	22734	5412
75	17753	6582
70	15466	7521
65	14256	8291
60	13556	8946
55	13149	9523
50	12899	10029
45	12737	10490


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.76	.73
2.0	.86	.79	.73	.84	.77	.71	.79	.73	.68	.74	.69	.65	.70	.66	.63	.60
3.0	.75	.67	.60	.73	.65	.59	.69	.62	.57	.65	.59	.55	.61	.57	.53	.50
4.0	.66	.57	.50	.65	.56	.50	.61	.54	.48	.58	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.58	.49	.43	.55	.47	.41	.52	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.38	.52	.43	.37	.49	.42	.36	.47	.40	.35	.44	.39	.34	.32
7.0	.48	.39	.33	.47	.39	.33	.45	.37	.32	.42	.36	.31	.40	.35	.30	.28
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.28	.39	.32	.28	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.38	.30	.25	.36	.29	.25	.34	.29	.24	.22
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

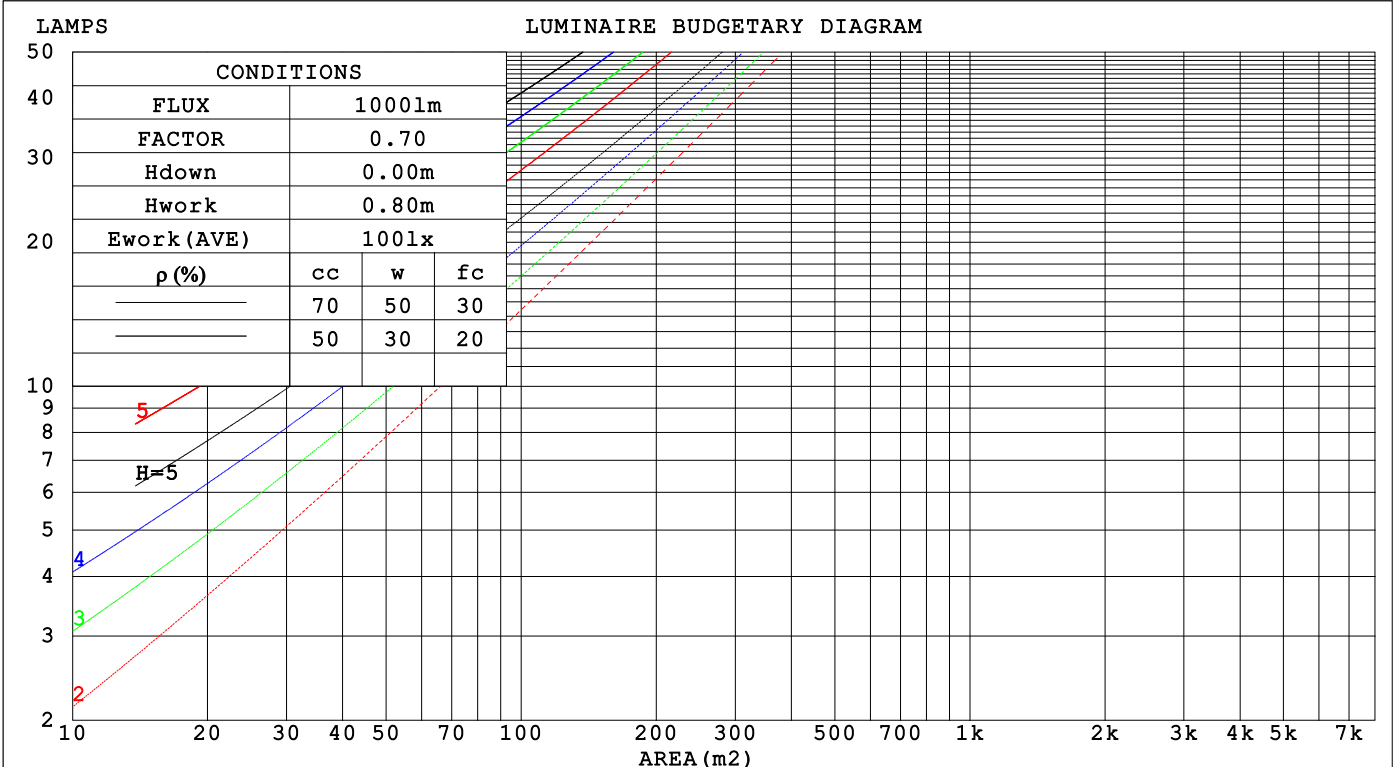

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.350	.199	.063	.340	.194	.062	.322	.185	.059	.305	.176	.056	.289	.168	.054	
2.0	.313	.171	.053	.304	.167	.052	.288	.160	.050	.272	.153	.048	.258	.146	.046	
3.0	.283	.150	.045	.275	.147	.044	.260	.141	.043	.246	.135	.041	.234	.129	.040	
4.0	.257	.134	.039	.250	.131	.039	.237	.126	.038	.225	.121	.036	.213	.116	.035	
5.0	.236	.120	.035	.229	.118	.034	.217	.113	.033	.206	.109	.032	.196	.105	.031	
6.0	.217	.109	.031	.211	.107	.031	.201	.103	.030	.191	.099	.029	.181	.095	.028	
7.0	.201	.099	.028	.196	.098	.028	.186	.094	.027	.177	.091	.026	.169	.088	.026	
8.0	.187	.091	.026	.183	.090	.025	.174	.087	.025	.165	.084	.024	.157	.081	.024	
9.0	.175	.085	.024	.171	.083	.023	.163	.080	.023	.155	.078	.022	.148	.075	.022	
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.072	.021	.139	.070	.020	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.256	.256	.256	.219	.219	.219	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.249	.222	.197	.213	.190	.170	.146	.131	.117	.084	.076	.068	.027	.024	.022	
2.0	.242	.198	.162	.207	.171	.140	.142	.118	.098	.082	.069	.057	.026	.022	.019	
3.0	.234	.181	.139	.200	.156	.121	.138	.109	.085	.079	.063	.050	.026	.021	.016	
4.0	.226	.168	.124	.194	.145	.108	.133	.101	.076	.077	.059	.045	.025	.019	.015	
5.0	.218	.158	.114	.188	.137	.099	.129	.096	.070	.075	.056	.041	.024	.018	.014	
6.0	.211	.150	.106	.181	.130	.093	.125	.091	.065	.073	.054	.039	.023	.017	.013	
7.0	.204	.143	.101	.176	.124	.088	.121	.087	.062	.070	.051	.037	.023	.017	.012	
8.0	.198	.138	.096	.170	.119	.084	.118	.084	.060	.068	.049	.036	.022	.016	.012	
9.0	.191	.133	.093	.165	.115	.081	.114	.081	.058	.067	.048	.034	.022	.016	.011	
10.0	.186	.129	.091	.160	.112	.079	.111	.079	.056	.065	.046	.033	.021	.015	.011	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm										
NAME: T06			TYPE:				WEIGHT:			
SPEC.:			DIM.: 1450*75*75mm				SERIAL No.:			
MFR.: EVERFINE			SUR.: 1412*70*35mm				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.3	22.8	21.7	23.1	23.5	19.9	21.3	20.3	21.7	22.1
3H	23.5	24.8	23.9	25.2	25.6	21.2	22.5	21.6	22.9	23.3
4H	24.6	25.9	25.1	26.3	26.7	21.7	22.9	22.1	23.3	23.8
6H	25.9	27.1	26.3	27.5	28.0	21.9	23.1	22.4	23.6	24.0
8H	26.6	27.7	27.0	28.2	28.6	22.0	23.1	22.4	23.6	24.0
12H	27.4	28.5	27.9	29.0	29.4	22.0	23.1	22.5	23.6	24.0
4H 2H	21.8	23.1	22.2	23.5	23.9	20.7	22.0	21.2	22.4	22.8
3H	24.2	25.3	24.6	25.7	26.2	22.3	23.4	22.7	23.8	24.3
4H	25.5	26.5	26.0	27.0	27.5	22.9	23.9	23.4	24.4	24.9
6H	26.9	27.8	27.5	28.3	28.9	23.3	24.2	23.9	24.7	25.3
8H	27.7	28.6	28.3	29.1	29.7	23.4	24.3	24.0	24.8	25.4
12H	28.7	29.5	29.3	30.0	30.6	23.5	24.3	24.1	24.8	25.4
8H 4H	25.7	26.6	26.2	27.1	27.6	23.5	24.4	24.1	24.9	25.5
6H	27.4	28.1	28.0	28.7	29.3	24.2	24.9	24.8	25.5	26.1
8H	28.4	29.0	29.0	29.6	30.2	24.5	25.1	25.1	25.7	26.3
12H	29.6	30.1	30.2	30.7	31.4	24.7	25.2	25.3	25.8	26.5
12H 4H	25.7	26.5	26.3	27.0	27.6	23.7	24.5	24.2	25.0	25.6
6H	27.5	28.1	28.0	28.7	29.3	24.5	25.2	25.1	25.7	26.4
8H	28.5	29.1	29.1	29.7	30.3	24.9	25.5	25.5	26.1	26.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 8319 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 7.4)  
 Area: 0.197 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	34	52	41	34	51	40	34	27
0.80	63	50	43	61	50	42	59	49	42	35
1.00	71	59	51	69	58	50	66	59	50	42
1.25	78	66	58	76	65	58	72	63	56	48
1.50	83	72	64	80	70	63	77	68	62	53
2.00	90	80	72	87	78	71	83	75	69	60
2.50	94	85	78	91	83	76	86	79	74	64
3.00	97	89	83	94	87	81	89	83	78	67
4.00	102	95	89	98	92	87	93	88	84	72
5.00	104	98	93	101	96	91	95	91	87	75
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

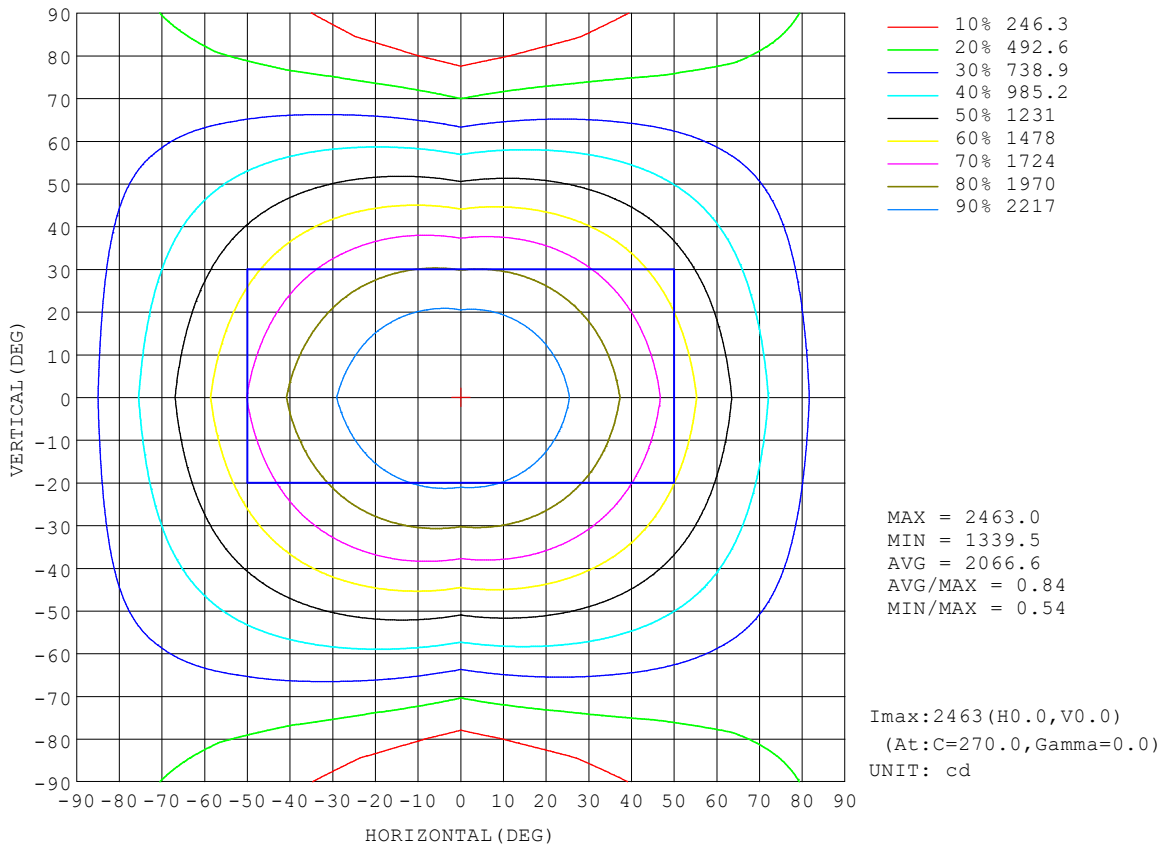


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

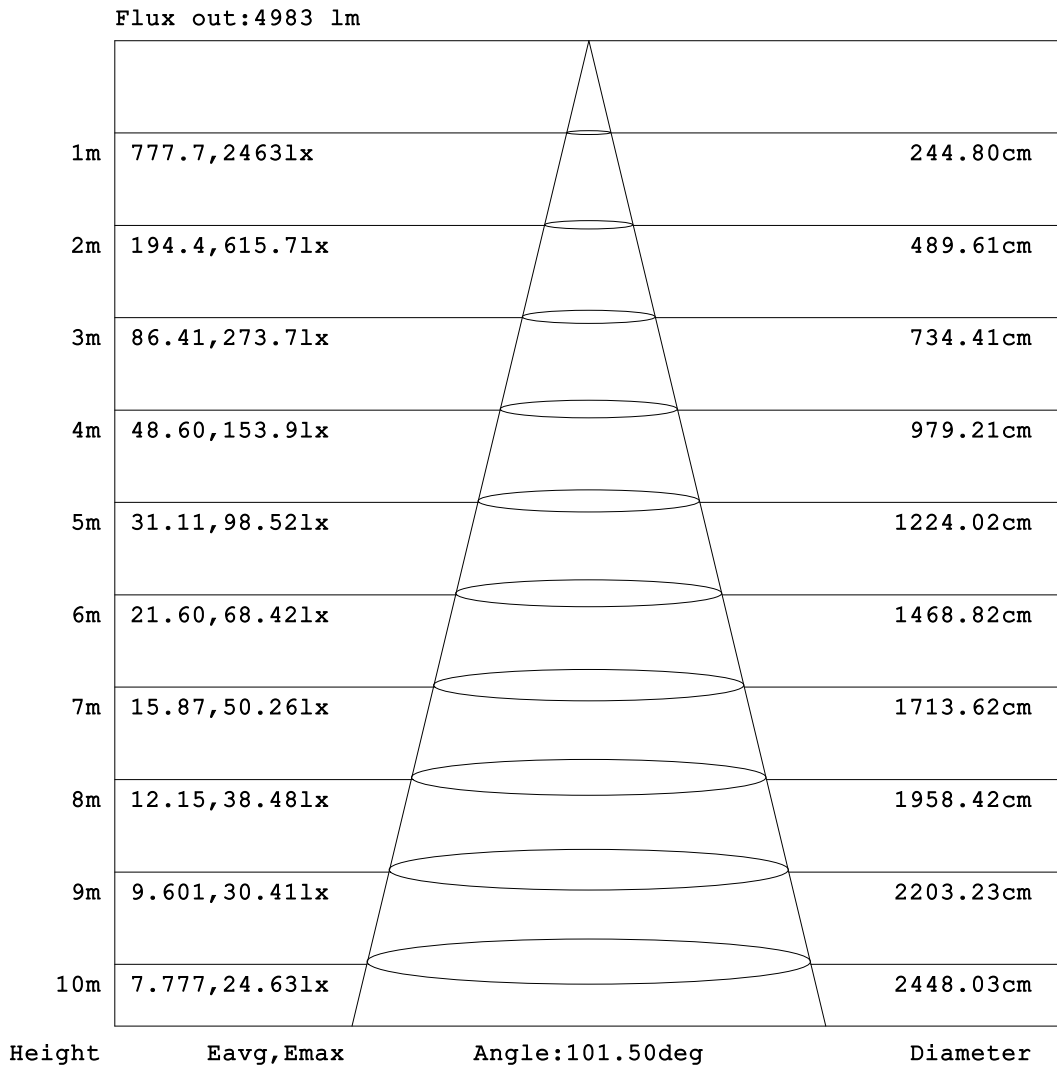


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

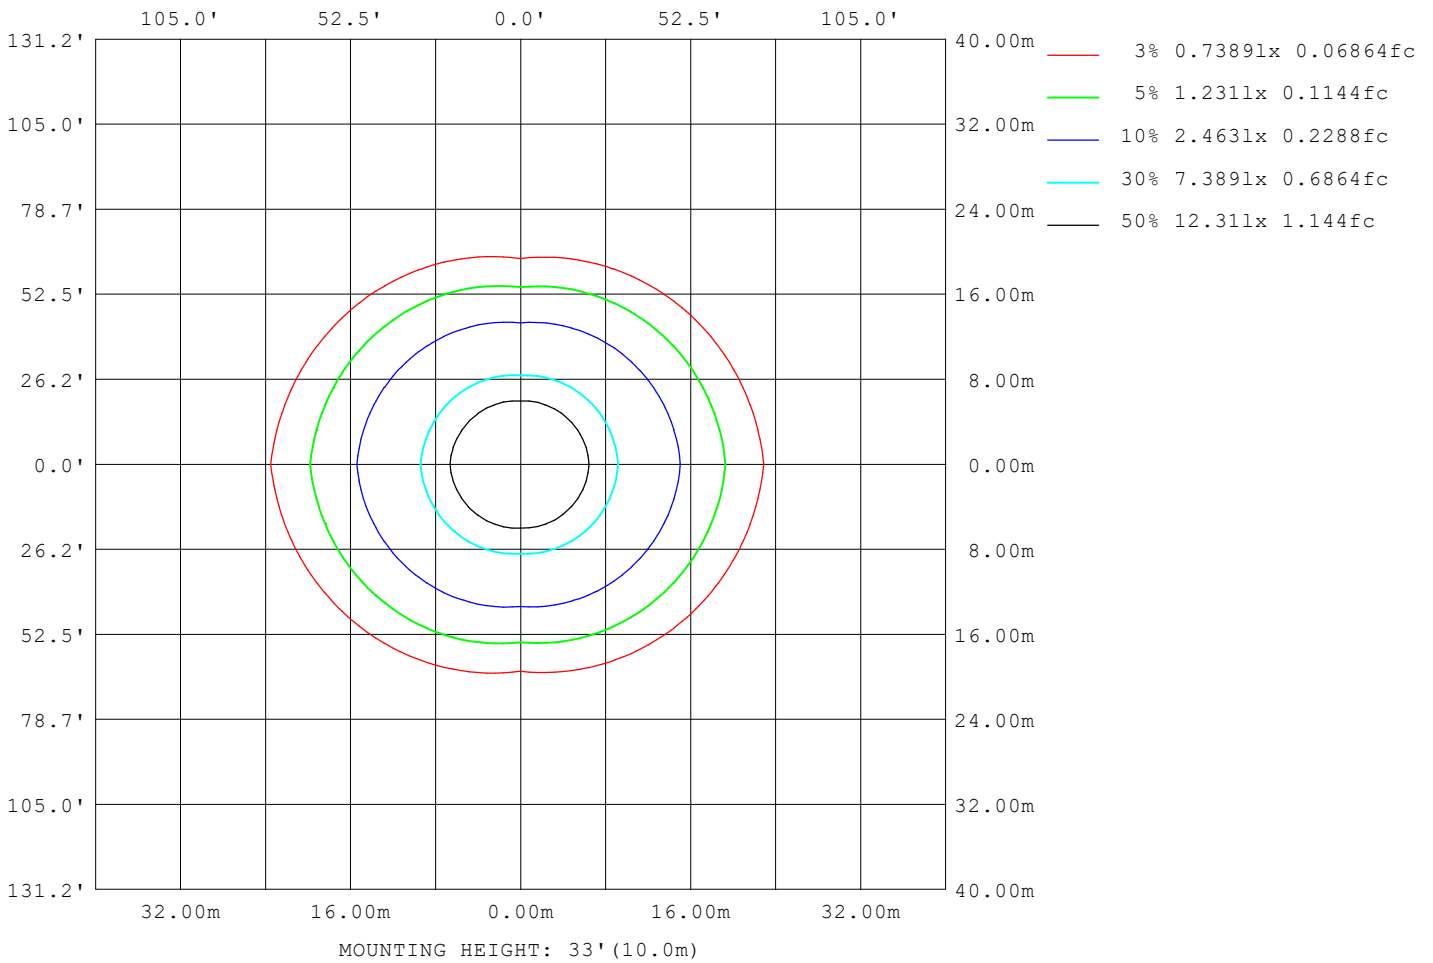

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14857
L_0~180 (75) av	18648
L_0~180 (85) av	40750
L_90~270 (65) av	8192
L_90~270 (75) av	6460
L_90~270 (85) av	3699
L_45 (65) av	10731
L_45 (75) av	11090
L_45 (85) av	17741

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

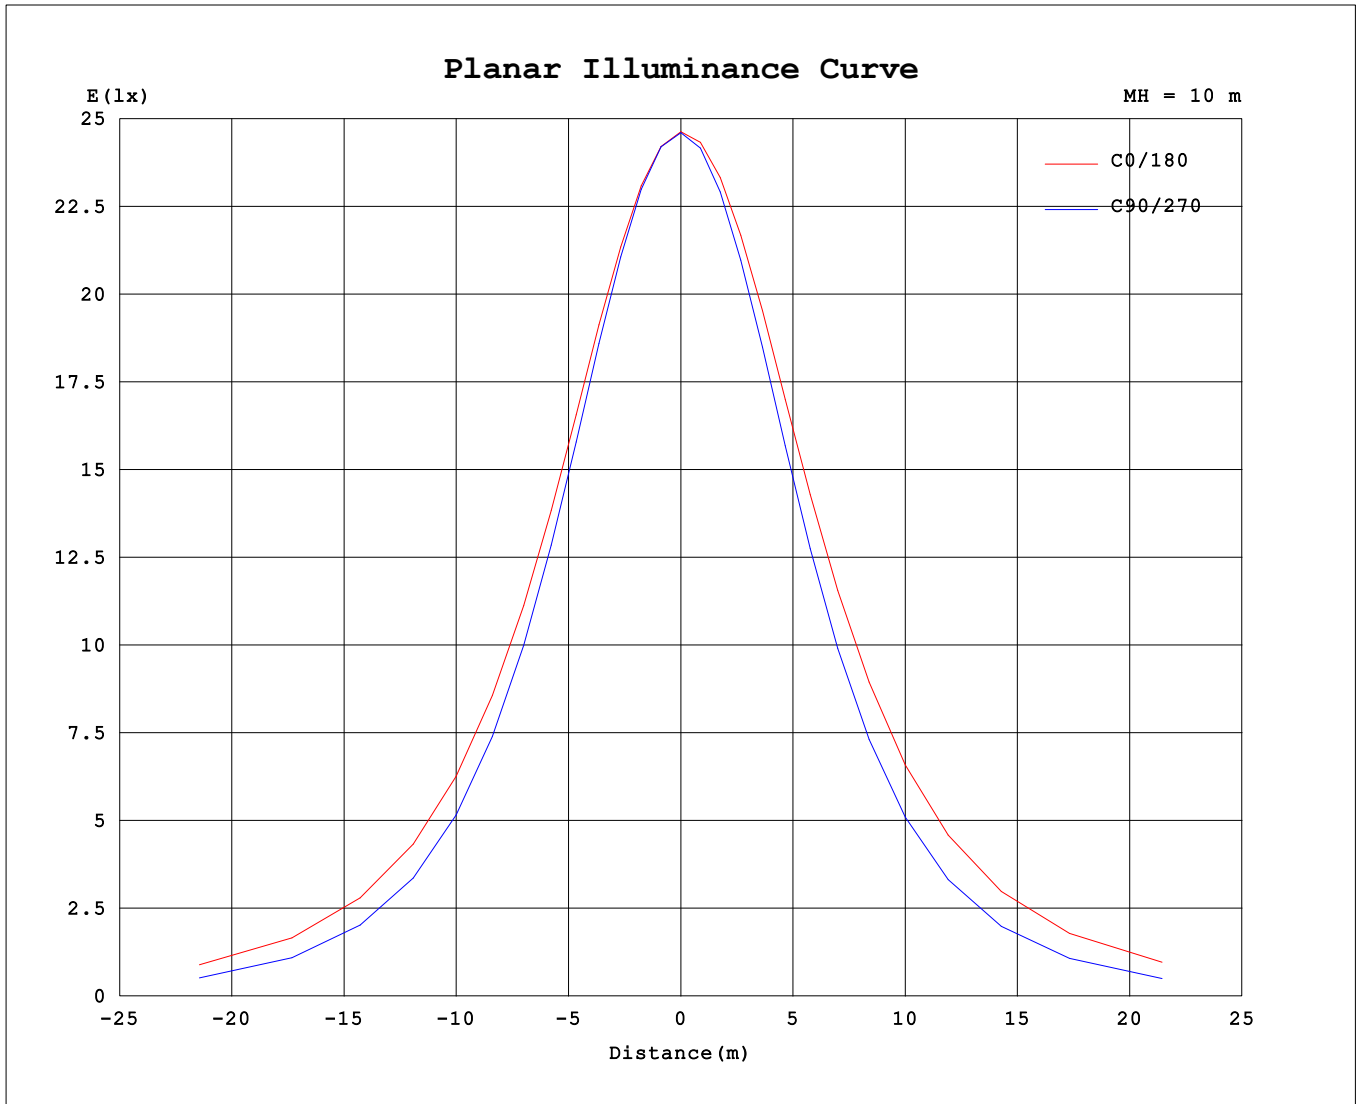

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity: 65.0%  
 Test Distance: 12.177m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.66V I:0.2900A P:48.948W PF:0.7648 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:8318.57x1 lm		
NAME: T06	TYPE:	WEIGHT:
SPEC.:	DIM.: 1450*75*75mm	SERIAL No.:
MFR.: EVERFINE	SUR.: 1412*70*35mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	2462	2462	2462	2462															
5	2447	2449	2460	2445															
10	2416	2408	2441	2400															
15	2368	2339	2405	2328															
20	2304	2243	2353	2230															
25	2224	2122	2284	2107															
30	2130	1981	2200	1964															
35	2024	1821	2102	1803															
40	1904	1647	1990	1629															
45	1773	1462	1864	1443															
50	1633	1271	1728	1252															
55	1485	1077	1584	1058															
60	1335	882	1436	864															
65	1186	691	1288	673															
70	1042	507	1140	490															
75	905	336	997	323															
80	777	185	863	172															
85	661	68.4	738	58.6															
90	558	7.11	627	3.61															
95	467	3.03	525	3.20															
100	388	3.38	437	3.39															
105	321	3.76	361	3.83															
110	263	4.39	297	4.48															
115	213	5.13	242	5.21															
120	172	5.88	196	5.99															
125	139	6.66	158	6.77															
130	110	7.45	124	7.54															
135	84.7	8.33	94.7	8.29															
140	62.8	9.39	69.5	9.03															
145	44.9	10.0	48.2	9.74															
150	30.1	10.7	32.3	10.3															
155	23.0	11.2	23.7	10.9															
160	18.7	11.7	18.5	11.4															
165	15.9	12.0	15.0	11.8															
170	14.2	12.3	13.1	12.1															
175	12.8	12.4	12.1	12.3															
180	12.2	12.4	12.2	12.4															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2023-10-09

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.471  
 Humidity:65.0%  
 Test Distance:12.177m [K=1.0000]  
 Remarks: