
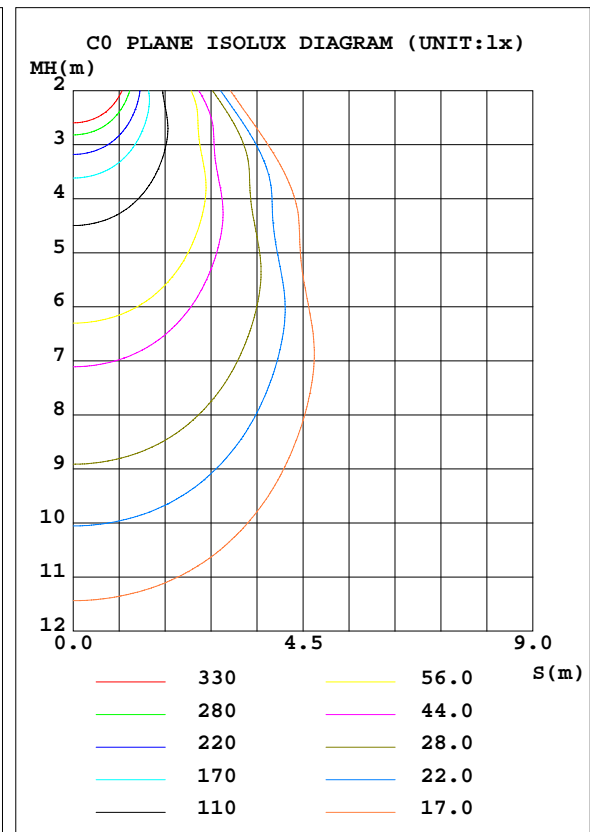


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	47026362	Imax(cd)	2252	S/MH(C0/180)	1.09
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.10
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	4001.7	η UP, DN(C0-180)	0.1,50.1
NOMINAL FLUX(lm)	4001.69	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,49.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.15

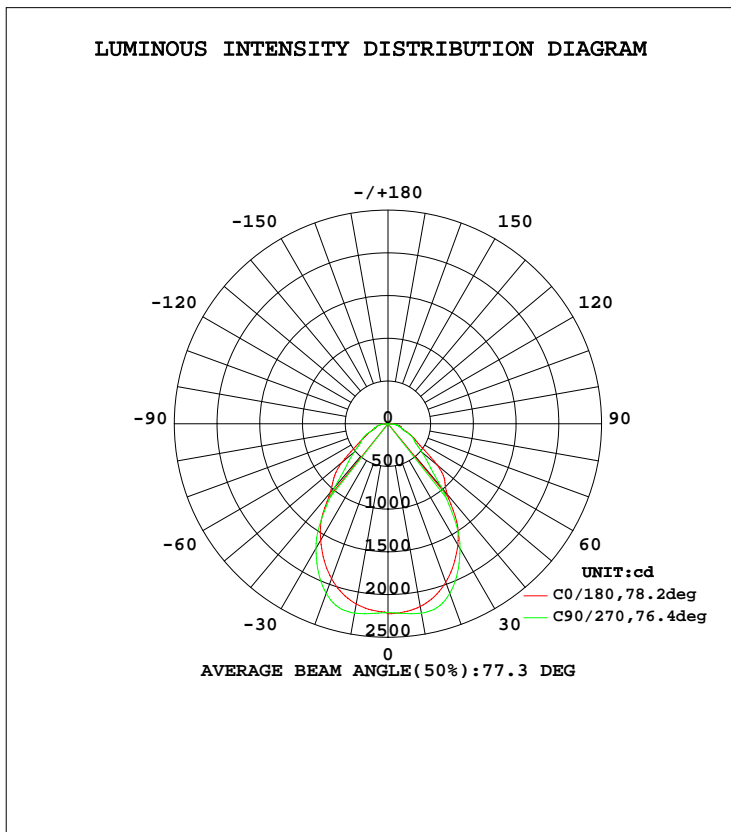

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	2171	2217	2251	2192	2143	2192	2251	2217	0- 10	211.1	211.1	5.27,5.27
20	1976	2067	2115	2013	1932	2013	2115	2067	10- 20	604.4	815.4	20.4,20.4
30	1634	1696	1686	1631	1576	1631	1686	1696	20- 30	853.9	1669	41.7,41.7
40	1081	1075	970.3	980.5	1052	980.5	970.3	1075	30- 40	845.5	2515	62.8,62.8
50	751.5	589.9	518.8	542.6	702.8	542.6	518.8	589.9	40- 50	607.3	3122	78,78
60	363.3	359.5	342.3	344.1	323.9	344.1	342.3	359.5	50- 60	395.8	3518	87.9,87.9
70	179.6	227.9	175.6	207.9	170.4	207.9	175.6	227.9	60- 70	262.7	3781	94.5,94.5
80	130.0	95.99	111.8	102.4	113.4	102.4	111.8	95.99	70- 80	155.2	3936	98.4,98.4
90	0.3060	0.2359	0.3349	0.2306	0.2094	0.2306	0.3349	0.2359	80- 90	59.00	3995	99.8,99.8
100	0.2481	0.2612	0.2703	0.2791	0.2657	0.2791	0.2703	0.2612	90-100	0.2682	3995	99.8,99.8
110	0.4250	0.4427	0.4477	0.4650	0.4738	0.4650	0.4477	0.4427	100-110	0.3907	3995	99.8,99.8
120	0.7224	0.7712	0.7837	0.8052	0.8016	0.8052	0.7837	0.7712	110-120	0.6107	3996	99.9,99.9
130	1.142	1.222	1.266	1.266	1.240	1.266	1.266	1.222	120-130	0.9106	3997	99.9,99.9
140	1.599	1.701	1.781	1.767	1.715	1.767	1.781	1.701	130-140	1.156	3998	99.9,99.9
150	2.141	2.216	2.296	2.295	2.265	2.295	2.296	2.216	140-150	1.251	3999	99.9,99.9
160	2.756	2.774	2.836	2.867	2.849	2.867	2.836	2.774	150-160	1.173	4000	100,100
170	3.262	3.267	3.293	3.328	3.320	3.328	3.293	3.267	160-170	0.8686	4001	100,100
180	3.546	3.520	3.515	3.533	3.537	3.533	3.515	3.520	170-180	0.3256	4002	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.00	1.04	1.01	.98	.00	.97	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.90	.85	.93	.88	.84	.90	.86	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.72	.66	.62	.70	.65	.61	.59
5.0	.71	.63	.57	.70	.62	.57	.68	.61	.56	.66	.60	.56	.64	.59	.55	.53
6.0	.65	.57	.51	.64	.56	.51	.62	.55	.51	.60	.55	.50	.59	.54	.50	.48
7.0	.59	.52	.46	.59	.51	.46	.57	.51	.46	.56	.50	.45	.55	.49	.45	.43
8.0	.55	.47	.42	.54	.47	.42	.53	.46	.42	.52	.46	.41	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

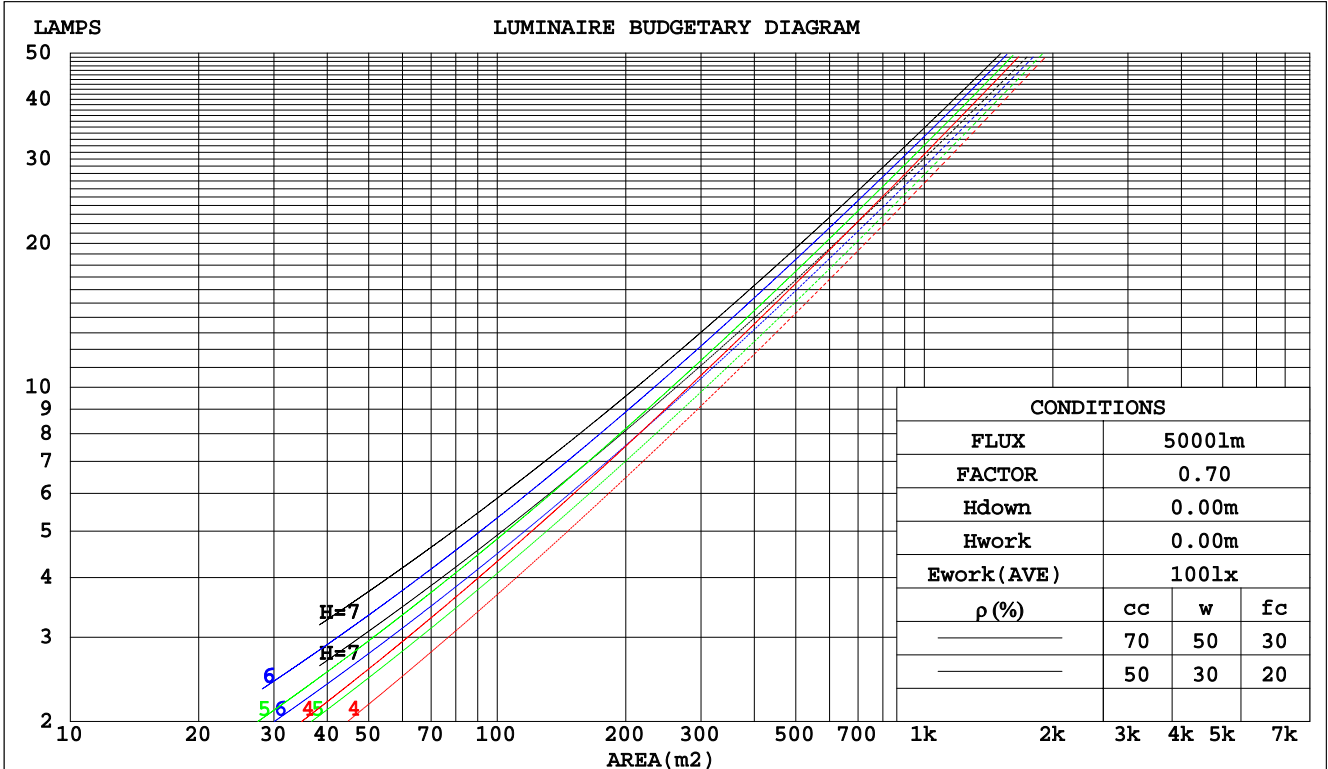

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

WEC AND CCEC

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.260	.148	.047	.253	.144	.046	.240	.137	.044	.227	.131	.042	.216	.125	.040	
2.0	.245	.134	.041	.239	.132	.041	.227	.126	.039	.217	.122	.038	.207	.117	.037	
3.0	.229	.122	.036	.223	.120	.036	.214	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.214	.111	.033	.209	.109	.032	.200	.106	.032	.192	.103	.031	.184	.100	.031	
5.0	.200	.102	.029	.196	.100	.029	.188	.098	.029	.181	.095	.028	.174	.093	.028	
6.0	.187	.094	.027	.183	.093	.027	.177	.090	.026	.170	.088	.026	.164	.086	.026	
7.0	.176	.087	.025	.173	.086	.025	.166	.084	.024	.161	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.156	.076	.021	.154	.075	.021	.149	.074	.021	.144	.072	.021	.140	.071	.021	
10.0	.148	.071	.020	.146	.070	.020	.141	.069	.020	.137	.068	.019	.133	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.178	.158	.140	.152	.136	.120	.104	.093	.083	.060	.054	.048	.019	.017	.016	
2.0	.167	.133	.105	.143	.115	.091	.098	.079	.063	.057	.046	.037	.018	.015	.012	
3.0	.158	.115	.081	.135	.100	.071	.093	.069	.050	.054	.040	.029	.017	.013	.010	
4.0	.149	.102	.065	.128	.088	.056	.088	.061	.040	.051	.036	.024	.016	.012	.008	
5.0	.142	.091	.053	.122	.078	.046	.084	.055	.033	.049	.032	.019	.016	.011	.006	
6.0	.135	.082	.044	.116	.071	.039	.080	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.128	.075	.038	.110	.065	.033	.076	.046	.023	.044	.027	.014	.014	.009	.005	
8.0	.122	.069	.033	.105	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.116	.064	.029	.100	.056	.025	.070	.039	.018	.040	.023	.011	.013	.008	.004	
10.0	.111	.060	.025	.096	.052	.022	.067	.037	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

UGR(Unified Glare Rating) Table

NAME:		TYPE:LED					WEIGHT:				
SPEC.:6060M		DIM.: 595*595					SERIAL No.:				
MFR.: JT		SUR.:0.595*0.595					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	15.2	16.5	15.4	16.7	16.9	14.5	15.8	14.8	16.0	16.2	
3H	16.0	17.2	16.3	17.5	17.7	15.4	16.6	15.6	16.8	17.0	
4H	16.4	17.6	16.7	17.8	18.1	15.8	16.9	16.1	17.2	17.4	
6H	17.0	18.0	17.3	18.3	18.6	16.3	17.3	16.6	17.6	17.9	
8H	17.2	18.2	17.5	18.5	18.8	16.6	17.6	16.9	17.9	18.1	
12H	17.4	18.4	17.7	18.6	18.9	16.7	17.7	17.1	18.0	18.3	
4H 2H	15.5	16.6	15.8	16.9	17.1	14.9	16.1	15.2	16.3	16.6	
3H	16.6	17.6	16.9	17.9	18.2	16.0	17.0	16.4	17.3	17.6	
4H	17.1	18.0	17.5	18.3	18.7	16.6	17.5	17.0	17.8	18.1	
6H	17.7	18.6	18.1	18.9	19.3	17.2	18.0	17.6	18.4	18.7	
8H	18.1	18.8	18.5	19.2	19.6	17.6	18.4	18.0	18.7	19.1	
12H	18.3	19.0	18.7	19.4	19.8	17.9	18.6	18.3	19.0	19.4	
8H 4H	17.3	18.0	17.7	18.4	18.8	16.8	17.5	17.2	17.9	18.3	
6H	18.1	18.7	18.5	19.1	19.5	17.7	18.3	18.1	18.7	19.1	
8H	18.5	19.0	18.9	19.5	19.9	18.2	18.8	18.7	19.2	19.6	
12H	18.8	19.3	19.3	19.7	20.2	18.6	19.1	19.1	19.6	20.0	
12H 4H	17.3	18.0	17.7	18.4	18.8	16.8	17.5	17.2	17.9	18.3	
6H	18.1	18.7	18.6	19.1	19.6	17.7	18.3	18.2	18.7	19.2	
8H	18.6	19.1	19.1	19.5	20.0	18.4	18.8	18.9	19.3	19.8	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.8 / - 0.6					+ 0.6 / - 0.3					

CIE Pub.117 Corrected 4002 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

UTILIZATION FACTORS TABLE

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	69	59	53	68	59	53	67	58	53	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	76	70	84	75	70	82	76	69	63
1.25	91	83	77	90	82	76	87	81	76	70
1.50	95	87	82	94	86	81	91	85	80	74
2.00	100	94	88	99	92	88	95	90	86	79
2.50	103	97	92	101	96	91	98	93	89	82
3.00	106	100	96	104	99	95	100	96	93	85
4.00	109	105	101	107	103	99	103	99	97	88
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

Conical surface Flux(90deg):

2846.7 lm
 %lum = 71.1%
 %lamp = 71.1%

Conical surface Flux(120deg):

3517.8 lm
 %lum = 87.9%
 %lamp = 87.9%

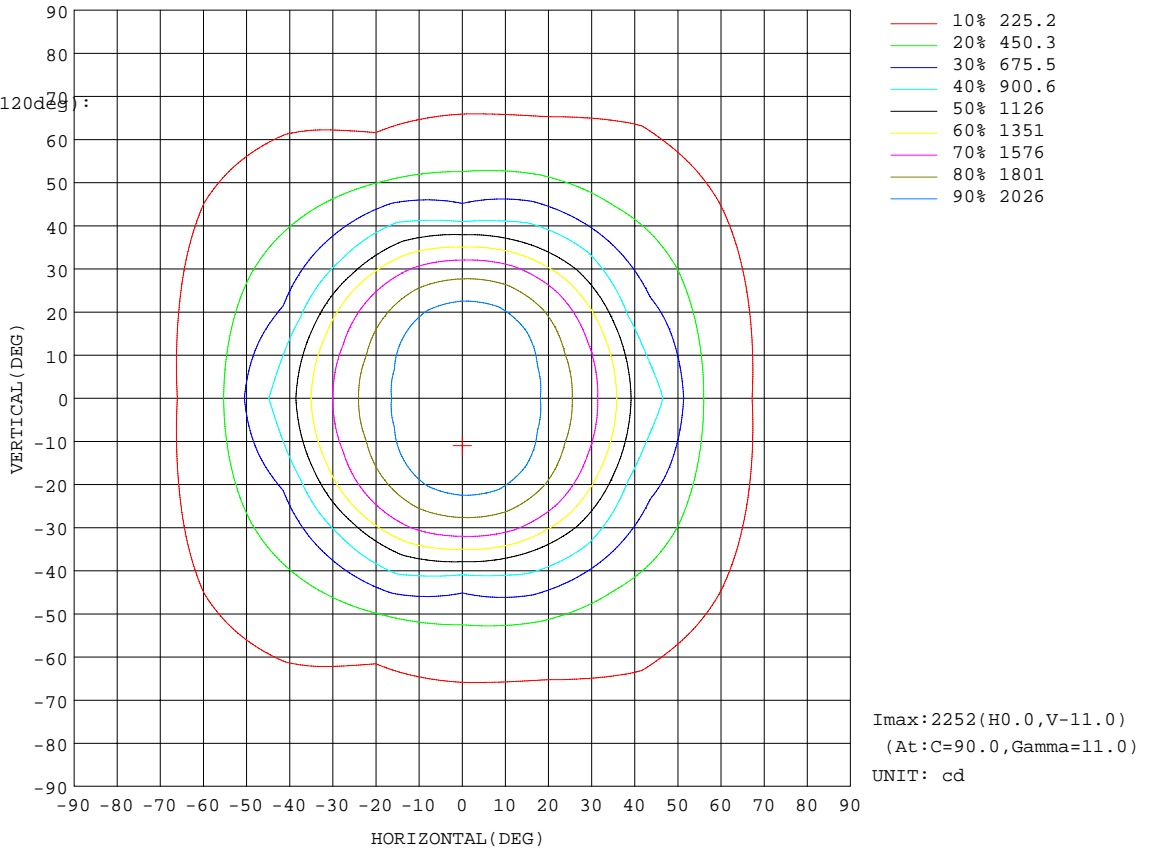


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

AAI Figure

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

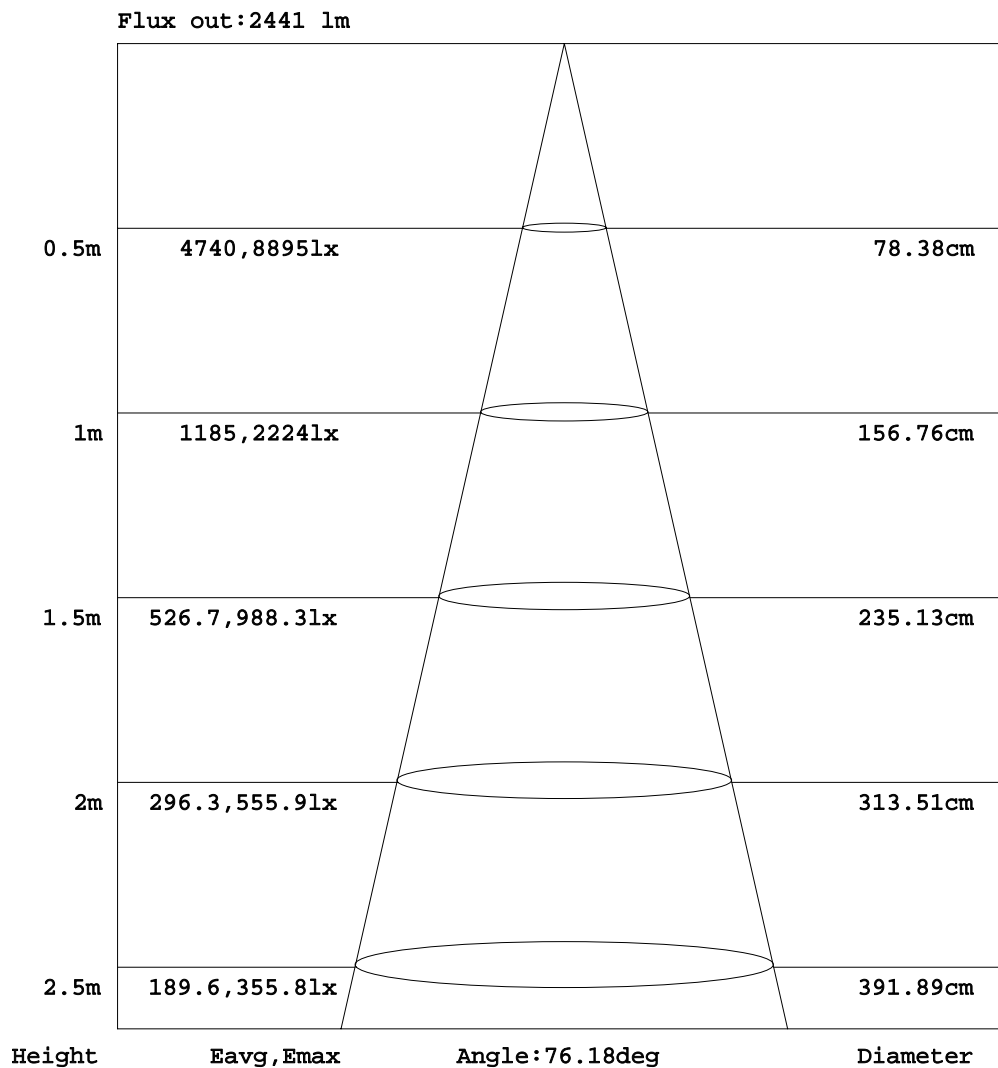


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

ISOLUX DIAGRAM

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

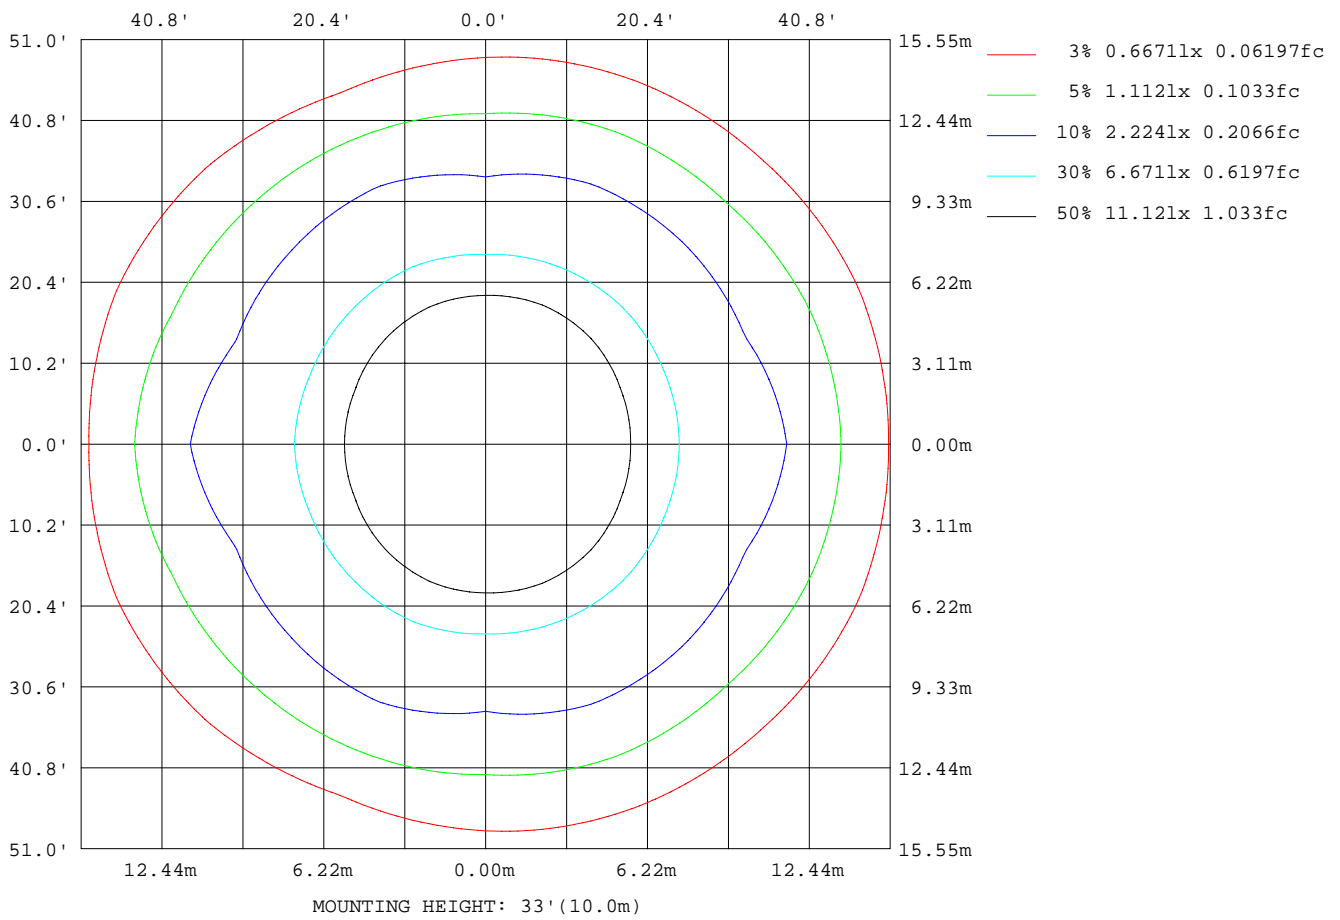

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

LED Avg.L Report

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1721
L_0~180(75)av	1643
L_0~180(85)av	1846
L_90~270(65)av	1674
L_90~270(75)av	1557
L_90~270(85)av	1685
L_45(65)av	1877
L_45(75)av	1604
L_45(85)av	1869

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks:

Planar Illuminance Curve

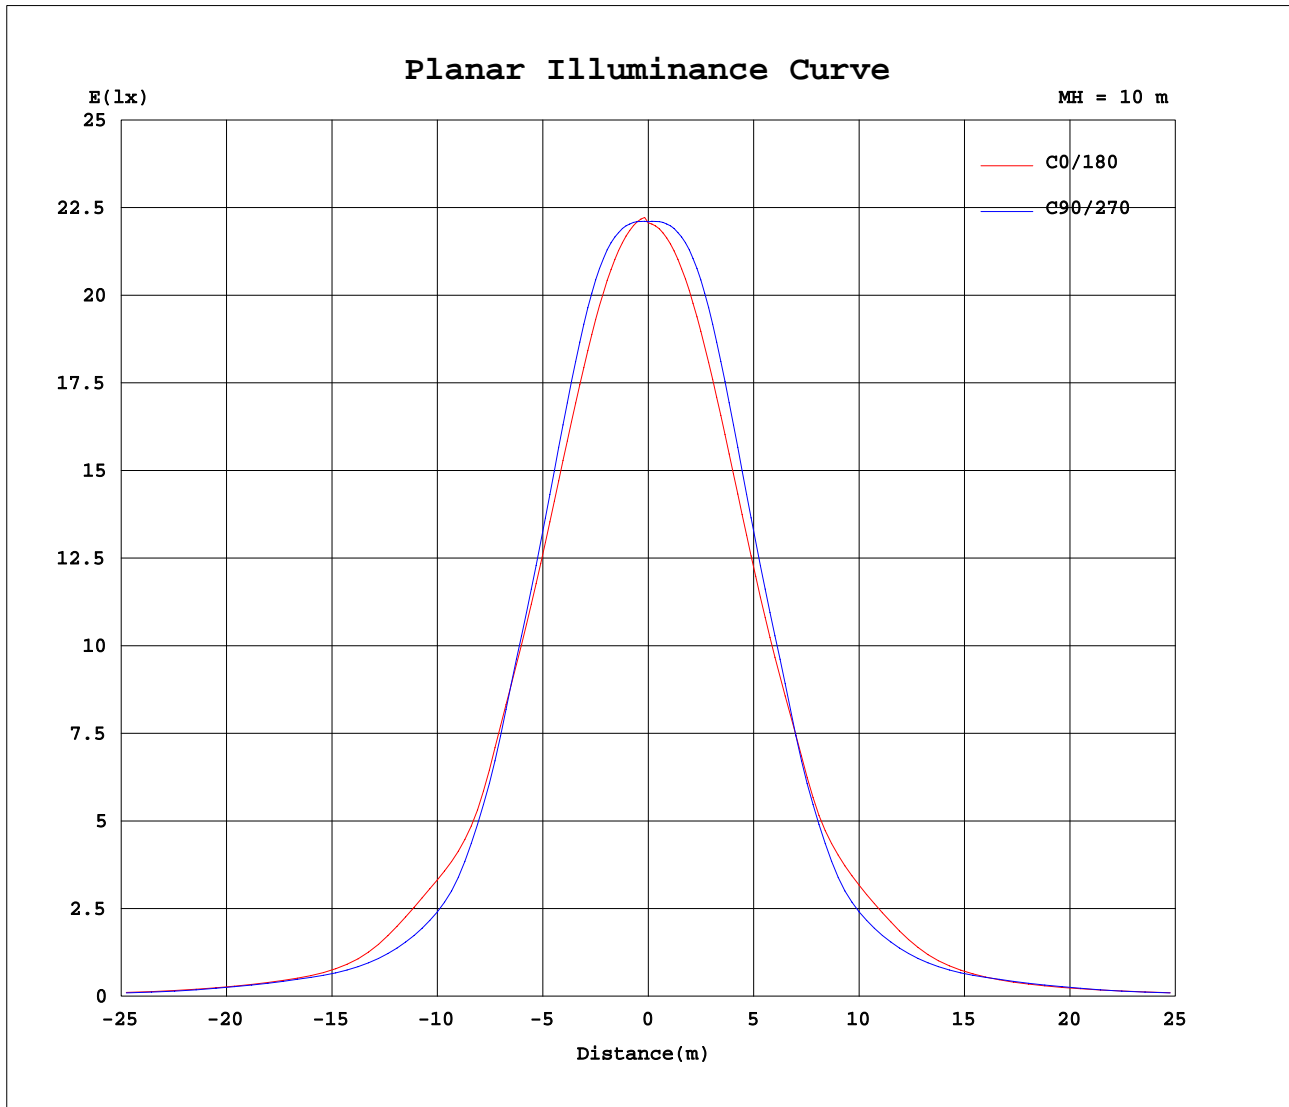

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LXF
 Test Date: 2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity: 25.0%
 Test Distance: 7.560m [K=0.9921]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:LED	WEIGHT:
SPEC.:6060M	DIM.: 595*595	SERIAL No.:
MFR.: JT	SUR.:0.595*0.595	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2224	2217	2215	2211	2210	2208	2209	2206	2207	2206	2209	2208	2210	2211	2215	2217			
5	2210	2213	2222	2227	2229	2220	2207	2193	2188	2193	2207	2220	2229	2227	2222	2213			
10	2171	2185	2217	2243	2251	2229	2192	2156	2143	2156	2192	2229	2251	2243	2217	2185			
15	2095	2119	2174	2220	2226	2196	2132	2075	2057	2075	2132	2196	2226	2220	2174	2119			
20	1976	1996	2067	2116	2115	2086	2013	1945	1932	1945	2013	2086	2115	2116	2067	1996			
25	1818	1833	1898	1937	1923	1904	1838	1773	1767	1773	1838	1904	1923	1937	1898	1833			
30	1634	1647	1696	1712	1686	1679	1631	1580	1576	1580	1631	1679	1686	1712	1696	1647			
35	1404	1393	1421	1406	1352	1392	1348	1322	1355	1322	1348	1392	1352	1406	1421	1393			
40	1081	1044	1075	1035	970	1050	981	983	1052	983	981	1050	970	1035	1075	1044			
45	939	771	827	810	681	803	749	708	896	708	749	803	681	810	827	771			
50	752	627	590	574	519	546	543	549	703	549	543	546	519	574	590	627			
55	485	480	436	426	399	385	421	449	461	449	421	385	399	426	436	480			
60	363	371	359	331	342	283	344	350	324	350	344	283	342	331	359	371			
65	268	334	273	244	248	203	283	277	241	277	283	203	248	244	273	334			
70	180	207	228	203	176	173	208	213	170	213	208	173	176	203	228	207			
75	162	141	144	135	141	147	146	146	136	146	146	147	141	135	144	141			
80	130	95.2	96.0	111	112	113	102	102	113	102	102	113	112	111	96.0	95.2			
85	57.5	57.0	53.3	66.1	51.4	56.5	60.7	58.7	55.2	58.7	60.7	56.5	51.4	66.1	53.3	57.0			
90	0.31	0.23	0.24	0.21	0.33	0.21	0.23	0.23	0.21	0.23	0.23	0.21	0.33	0.21	0.24	0.23			
95	0.20	0.25	0.24	0.26	0.25	0.25	0.23	0.24	0.22	0.24	0.23	0.25	0.25	0.26	0.24	0.25			
100	0.25	0.30	0.26	0.30	0.27	0.31	0.28	0.31	0.27	0.31	0.28	0.31	0.27	0.30	0.26	0.30			
105	0.33	0.38	0.34	0.38	0.36	0.39	0.36	0.40	0.35	0.40	0.36	0.39	0.36	0.38	0.34	0.38			
110	0.42	0.47	0.44	0.47	0.45	0.50	0.46	0.51	0.47	0.51	0.46	0.50	0.45	0.47	0.44	0.47			
115	0.56	0.59	0.58	0.62	0.59	0.65	0.62	0.65	0.62	0.65	0.62	0.65	0.59	0.62	0.58	0.59			
120	0.72	0.77	0.77	0.81	0.78	0.83	0.81	0.83	0.80	0.83	0.81	0.83	0.78	0.81	0.77	0.77			
125	0.92	0.99	0.98	1.05	1.01	1.06	1.02	1.05	1.01	1.05	1.02	1.06	1.01	1.05	0.98	0.99			
130	1.14	1.22	1.22	1.29	1.27	1.30	1.27	1.30	1.24	1.30	1.27	1.30	1.27	1.29	1.22	1.22			
135	1.37	1.47	1.47	1.52	1.52	1.55	1.51	1.56	1.48	1.56	1.51	1.55	1.52	1.52	1.47	1.47			
140	1.60	1.71	1.70	1.76	1.78	1.79	1.77	1.79	1.71	1.79	1.77	1.79	1.78	1.76	1.70	1.71			
145	1.86	1.96	1.96	2.01	2.04	2.05	2.02	2.04	1.99	2.04	2.02	2.05	2.04	2.01	1.96	1.96			
150	2.14	2.23	2.22	2.28	2.30	2.32	2.29	2.31	2.26	2.31	2.29	2.32	2.30	2.28	2.22	2.23			
155	2.44	2.51	2.50	2.55	2.57	2.61	2.58	2.60	2.55	2.60	2.58	2.61	2.57	2.55	2.50	2.51			
160	2.76	2.81	2.77	2.84	2.84	2.90	2.87	2.90	2.85	2.90	2.87	2.90	2.84	2.84	2.77	2.81			
165	3.04	3.07	3.04	3.11	3.08	3.14	3.11	3.15	3.11	3.15	3.11	3.14	3.08	3.11	3.04	3.07			
170	3.26	3.29	3.27	3.32	3.29	3.36	3.33	3.35	3.32	3.35	3.33	3.36	3.29	3.32	3.27	3.29			
175	3.44	3.45	3.44	3.46	3.44	3.49	3.47	3.48	3.46	3.48	3.47	3.49	3.44	3.46	3.44	3.45			
180	3.55	3.53	3.52	3.52	3.52	3.52	3.53	3.53	3.54	3.53	3.53	3.52	3.52	3.52	3.52	3.53			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9921]
 Remarks: