
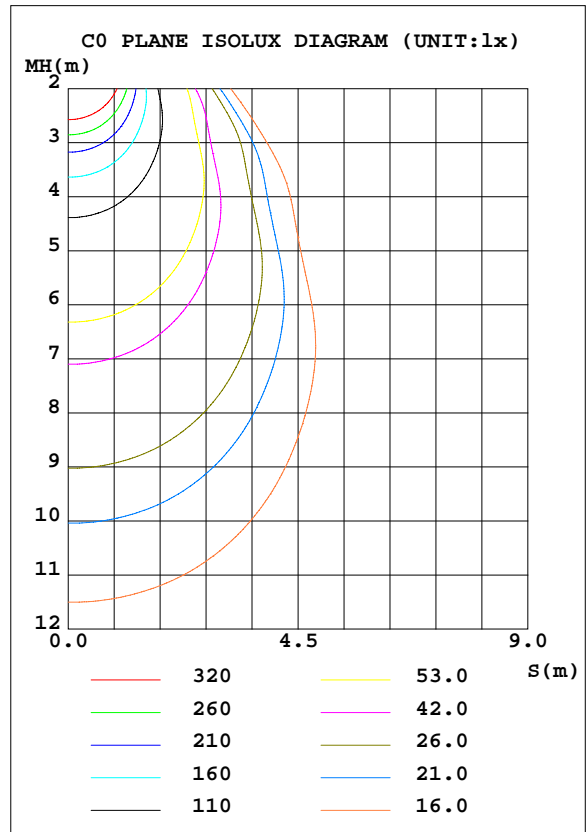


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.81 lm/W			
MODEL	47036362	I _{max} (cd)	2140	S/MH(C0/180)	1.09
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.12
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3906.3	η UP, DN(C0-180)	0.1,50.1
NOMINAL FLUX(lm)	3906.32	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,49.7
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.15

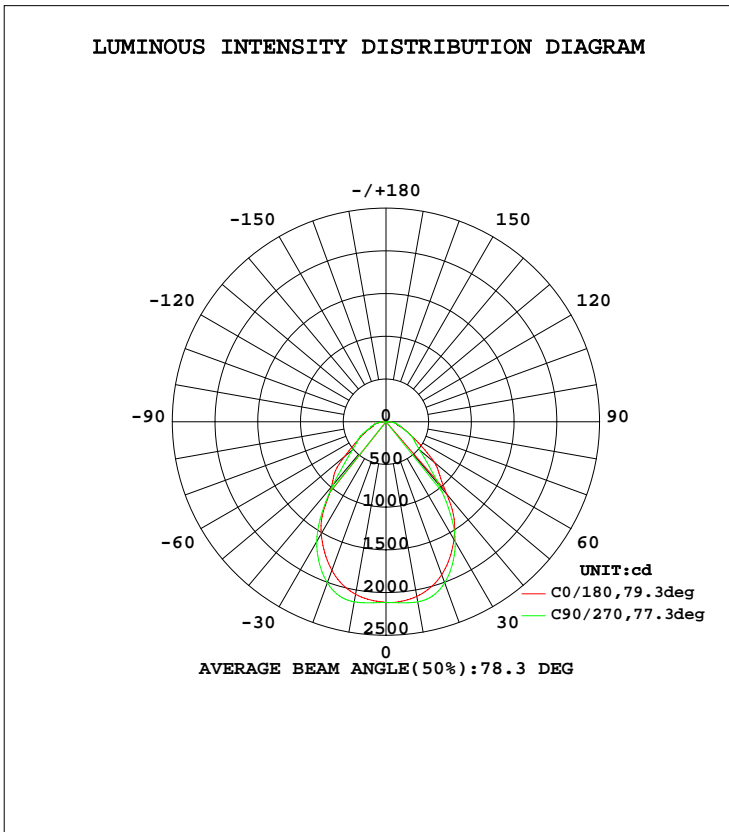

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	ℓlum,lamp
10	2076	2104	2140	2097	2051	2097	2140	2104	0- 10	201.5	201.5	5.16,5.16
20	1906	1954	2006	1932	1851	1932	2006	1954	10- 20	576.0	777.5	19.9,19.9
30	1591	1614	1623	1588	1517	1588	1623	1614	20- 30	818.7	1596	40.9,40.9
40	1108	1048	967.0	977.6	991.9	977.6	967.0	1048	30- 40	821.2	2417	61.9,61.9
50	738.5	570.7	516.4	545.9	636.5	545.9	516.4	570.7	40- 50	598.6	3016	77.2,77.2
60	365.1	357.8	353.5	332.7	328.7	332.7	353.5	357.8	50- 60	398.5	3414	87.4,87.4
70	192.4	230.9	195.1	215.0	169.5	215.0	195.1	230.9	60- 70	265.8	3680	94.2,94.2
80	121.7	108.3	118.5	97.25	107.1	97.25	118.5	108.3	70- 80	160.3	3841	98.3,98.3
90	5.398	3.159	0.5946	0.2511	0.2248	0.2511	0.5946	3.159	80- 90	59.22	3900	99.8,99.8
100	0.2510	0.2709	0.2427	0.2470	0.2671	0.2470	0.2427	0.2709	90-100	0.3744	3900	99.8,99.8
110	0.4289	0.4404	0.4005	0.4211	0.4572	0.4211	0.4005	0.4404	100-110	0.3702	3901	99.9,99.9
120	0.7200	0.7396	0.6998	0.7287	0.7692	0.7287	0.6998	0.7396	110-120	0.5718	3901	99.9,99.9
130	1.117	1.153	1.140	1.129	1.169	1.129	1.140	1.153	120-130	0.8424	3902	99.9,99.9
140	1.551	1.583	1.599	1.571	1.607	1.571	1.599	1.583	130-140	1.063	3903	99.9,99.9
150	2.040	2.053	2.061	2.044	2.105	2.044	2.061	2.053	140-150	1.145	3904	99.9,99.9
160	2.591	2.566	2.575	2.587	2.668	2.587	2.575	2.566	150-160	1.074	3905	100,100
170	3.041	3.021	3.021	3.045	3.106	3.045	3.021	3.021	160-170	0.7999	3906	100,100
180	3.292	3.272	3.272	3.292	3.317	3.292	3.272	3.272	170-180	0.3016	3906	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.92	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.80	.84	.80	.78	.76
3.0	.85	.78	.73	.84	.77	.72	.81	.75	.71	.78	.74	.70	.76	.72	.68	.66
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.62	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.62	.56	.67	.61	.56	.65	.60	.55	.63	.58	.54	.53
6.0	.64	.56	.51	.63	.56	.50	.62	.55	.50	.60	.54	.50	.58	.53	.49	.47
7.0	.59	.51	.46	.58	.51	.45	.57	.50	.45	.55	.49	.45	.54	.49	.45	.43
8.0	.54	.47	.42	.54	.46	.41	.53	.46	.41	.51	.45	.41	.50	.45	.41	.39
9.0	.50	.43	.38	.50	.43	.38	.49	.42	.38	.48	.42	.38	.47	.41	.37	.36
10.0	.47	.40	.35	.46	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33

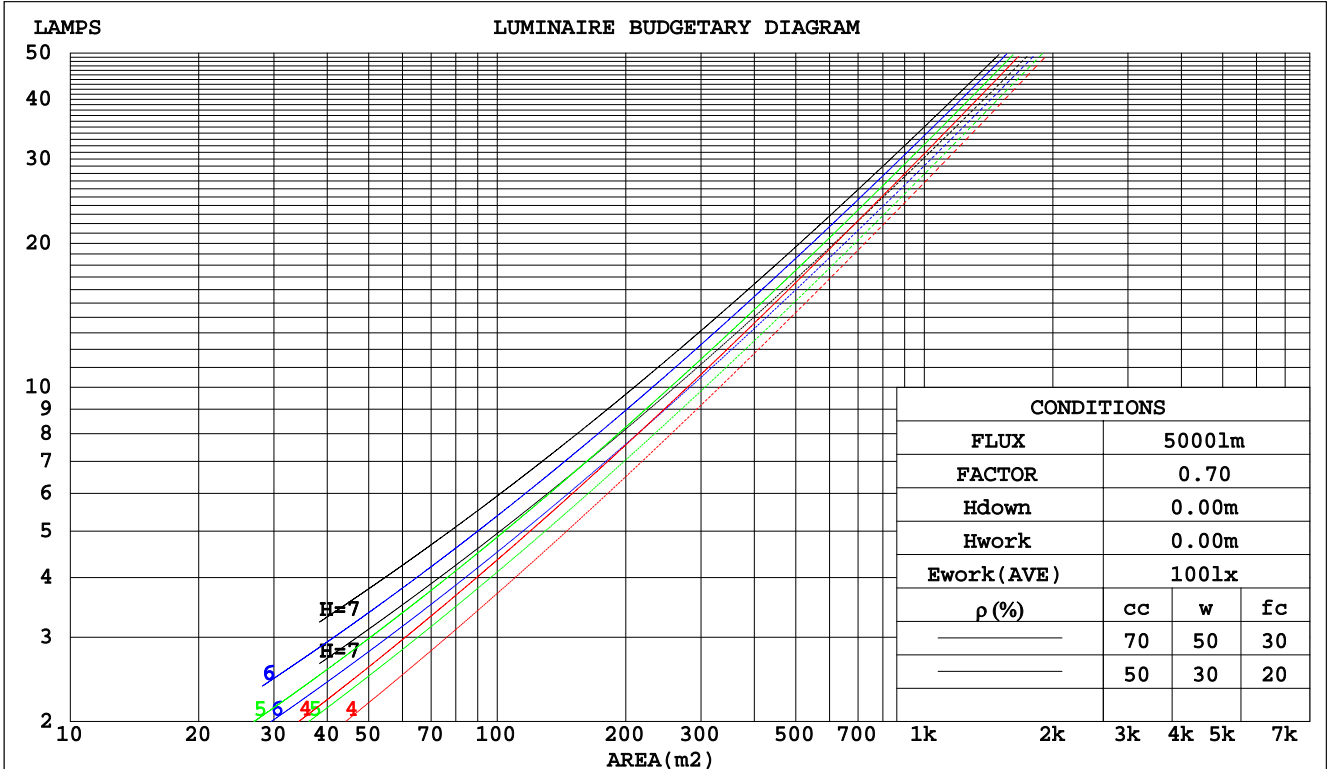

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

WEC AND CCEC

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.263	.149	.047	.256	.146	.046	.243	.139	.044	.231	.133	.043	.219	.127	.041	
2.0	.248	.136	.042	.242	.133	.041	.230	.128	.040	.220	.123	.039	.210	.119	.037	
3.0	.231	.123	.037	.226	.121	.036	.216	.117	.036	.207	.113	.035	.198	.110	.034	
4.0	.216	.112	.033	.211	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.201	.103	.030	.197	.101	.029	.189	.099	.029	.182	.096	.029	.176	.094	.028	
6.0	.189	.095	.027	.185	.093	.027	.178	.091	.027	.172	.089	.026	.166	.087	.026	
7.0	.177	.088	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024	.157	.081	.024	
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022	
9.0	.157	.076	.021	.155	.075	.021	.150	.074	.021	.145	.073	.021	.141	.072	.021	
10.0	.149	.071	.020	.147	.071	.020	.142	.070	.020	.138	.069	.019	.134	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.178	.158	.139	.153	.135	.120	.104	.093	.083	.060	.054	.048	.019	.017	.016	
2.0	.168	.133	.105	.144	.115	.090	.098	.079	.063	.057	.046	.037	.018	.015	.012	
3.0	.158	.115	.081	.136	.099	.070	.093	.069	.049	.054	.040	.029	.017	.013	.010	
4.0	.150	.102	.065	.129	.088	.056	.088	.061	.040	.051	.036	.023	.016	.012	.008	
5.0	.142	.091	.053	.122	.079	.046	.084	.055	.032	.049	.032	.019	.016	.011	.006	
6.0	.135	.082	.044	.116	.071	.038	.080	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.129	.075	.037	.111	.065	.033	.076	.046	.023	.044	.027	.014	.014	.009	.005	
8.0	.122	.069	.032	.105	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.117	.064	.028	.101	.056	.025	.070	.039	.018	.041	.023	.011	.013	.008	.003	
10.0	.112	.060	.025	.096	.052	.022	.067	.037	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: Panel light					TYPE:LED					WEIGHT:				
SPEC.:highbay					DIM.: 620*620					SERIAL No.:				
MFR.: JT					SUR.:0.620*0.620					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	15.0	16.4	15.3	16.6	16.8	14.5	15.8	14.7	16.0	16.2				
3H	16.0	17.2	16.3	17.4	17.7	15.3	16.5	15.6	16.7	17.0				
4H	16.4	17.5	16.7	17.8	18.0	15.8	17.0	16.1	17.2	17.5				
6H	16.9	17.9	17.2	18.2	18.5	16.4	17.5	16.7	17.8	18.0				
8H	17.1	18.1	17.4	18.4	18.7	16.7	17.8	17.0	18.0	18.3				
12H	17.3	18.3	17.6	18.6	18.9	16.9	17.9	17.3	18.2	18.5				
4H 2H	15.4	16.5	15.7	16.8	17.0	14.9	16.0	15.2	16.3	16.5				
3H	16.6	17.6	17.0	17.9	18.2	16.0	17.0	16.3	17.3	17.6				
4H	17.2	18.1	17.6	18.4	18.8	16.7	17.6	17.1	17.9	18.3				
6H	17.8	18.6	18.2	19.0	19.3	17.4	18.2	17.8	18.6	19.0				
8H	18.1	18.9	18.6	19.3	19.6	17.8	18.6	18.2	18.9	19.3				
12H	18.4	19.1	18.8	19.5	19.9	18.1	18.8	18.6	19.2	19.6				
8H 4H	17.4	18.2	17.9	18.6	18.9	17.0	17.8	17.4	18.1	18.5				
6H	18.2	18.9	18.7	19.3	19.7	17.9	18.6	18.4	19.0	19.4				
8H	18.7	19.2	19.1	19.6	20.1	18.5	19.0	18.9	19.4	19.9				
12H	19.1	19.5	19.5	20.0	20.5	18.9	19.4	19.4	19.8	20.3				
12H 4H	17.5	18.2	17.9	18.5	18.9	17.0	17.7	17.5	18.1	18.5				
6H	18.3	18.9	18.8	19.3	19.7	18.0	18.6	18.5	19.0	19.5				
8H	18.8	19.3	19.3	19.7	20.2	18.6	19.1	19.1	19.5	20.0				
Variations with the observer position at spacings:														
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4								
1.5H	+ 0.2 / - 0.2					+ 0.3 / - 0.3								
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.4								

CIE Pub.117 Corrected 3906 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.7)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	47
0.80	77	68	62	76	67	62	75	67	61	55
1.00	85	75	69	83	75	69	81	76	69	63
1.25	91	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	90	84	80	73
2.00	100	93	88	98	92	87	95	90	86	79
2.50	103	97	92	101	95	91	98	93	89	82
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	104	100	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

Conical surface Flux(90deg):
 2744.4 lm
 %lum = 70.3%
 %lamp = 70.3%

Conical surface Flux(120deg):
 3414.4 lm
 %lum = 87.4%
 %lamp = 87.4%

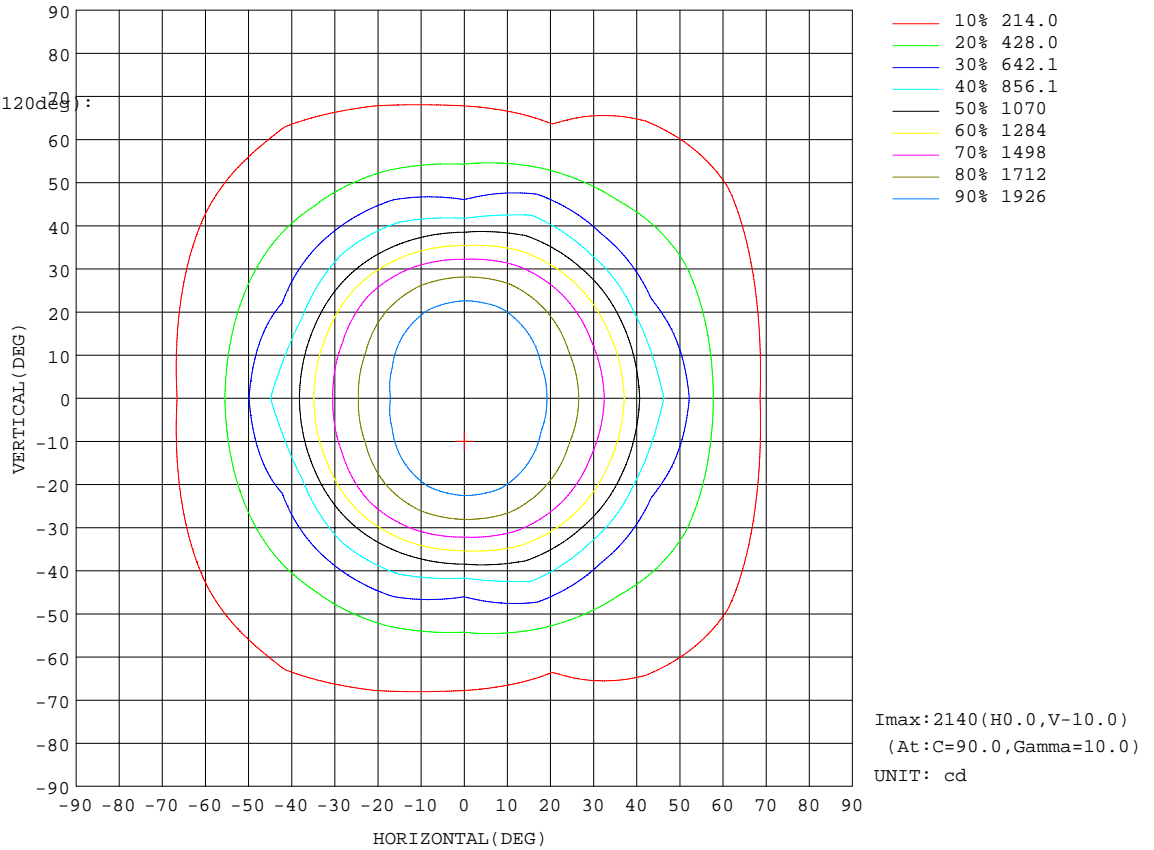


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LXF
 Test Date: 2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity: 25.0%
 Test Distance: 7.560m [K=0.9524]
 Remarks:

AAI Figure

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

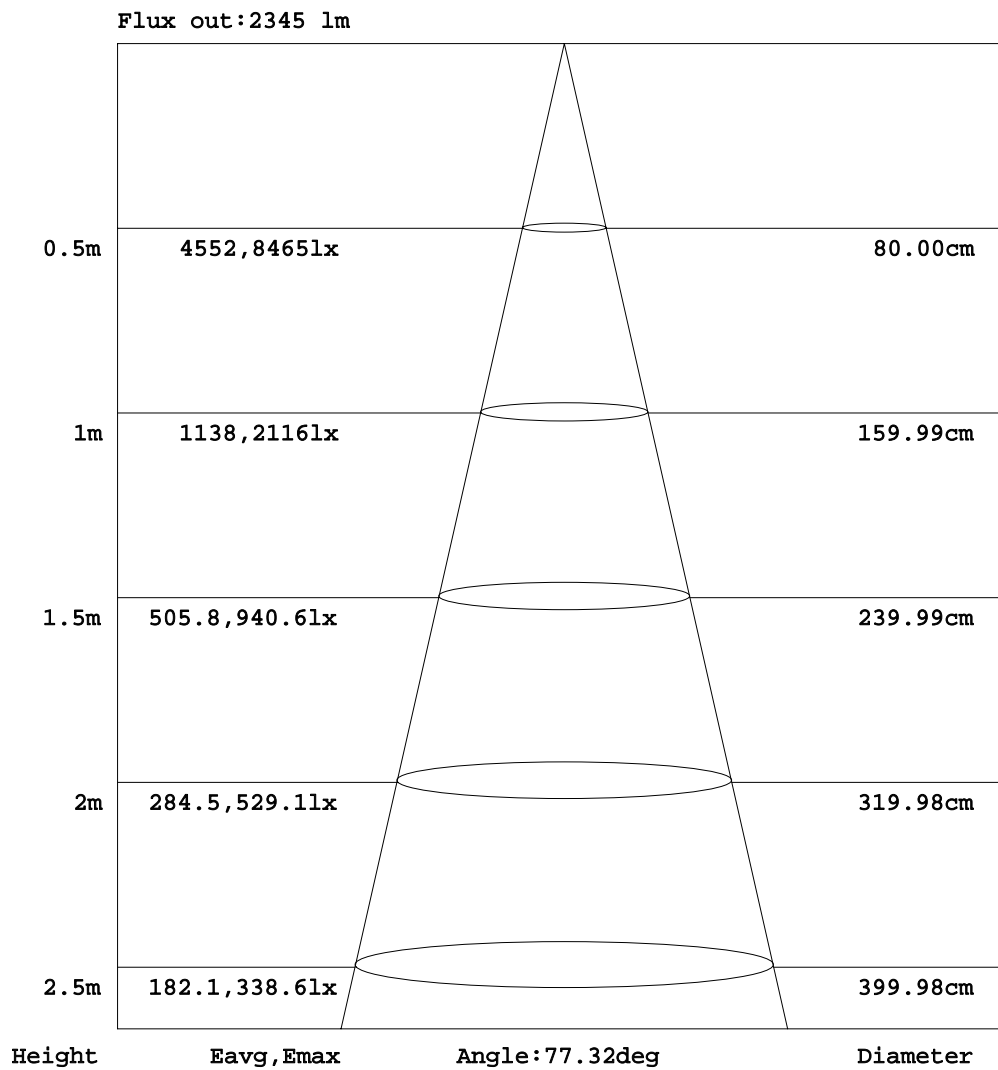


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

ISOLUX DIAGRAM

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

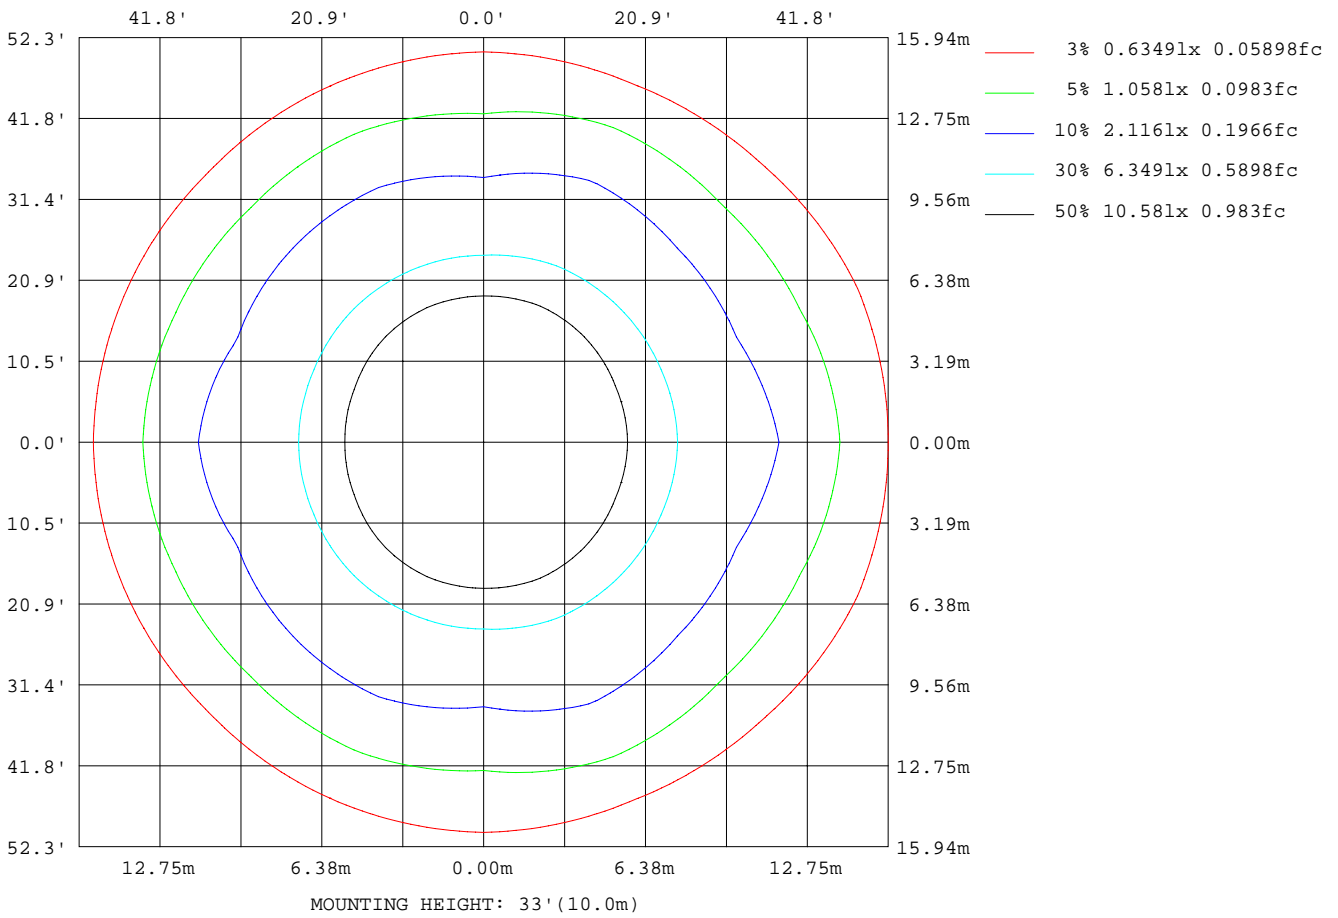

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

LED Avg.L Report

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1665
L_0~180(75)av	1558
L_0~180(85)av	1612
L_90~270(65)av	1724
L_90~270(75)av	1606
L_90~270(85)av	1967
L_45(65)av	1831
L_45(75)av	1627
L_45(85)av	1699

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks:

Planar Illuminance Curve

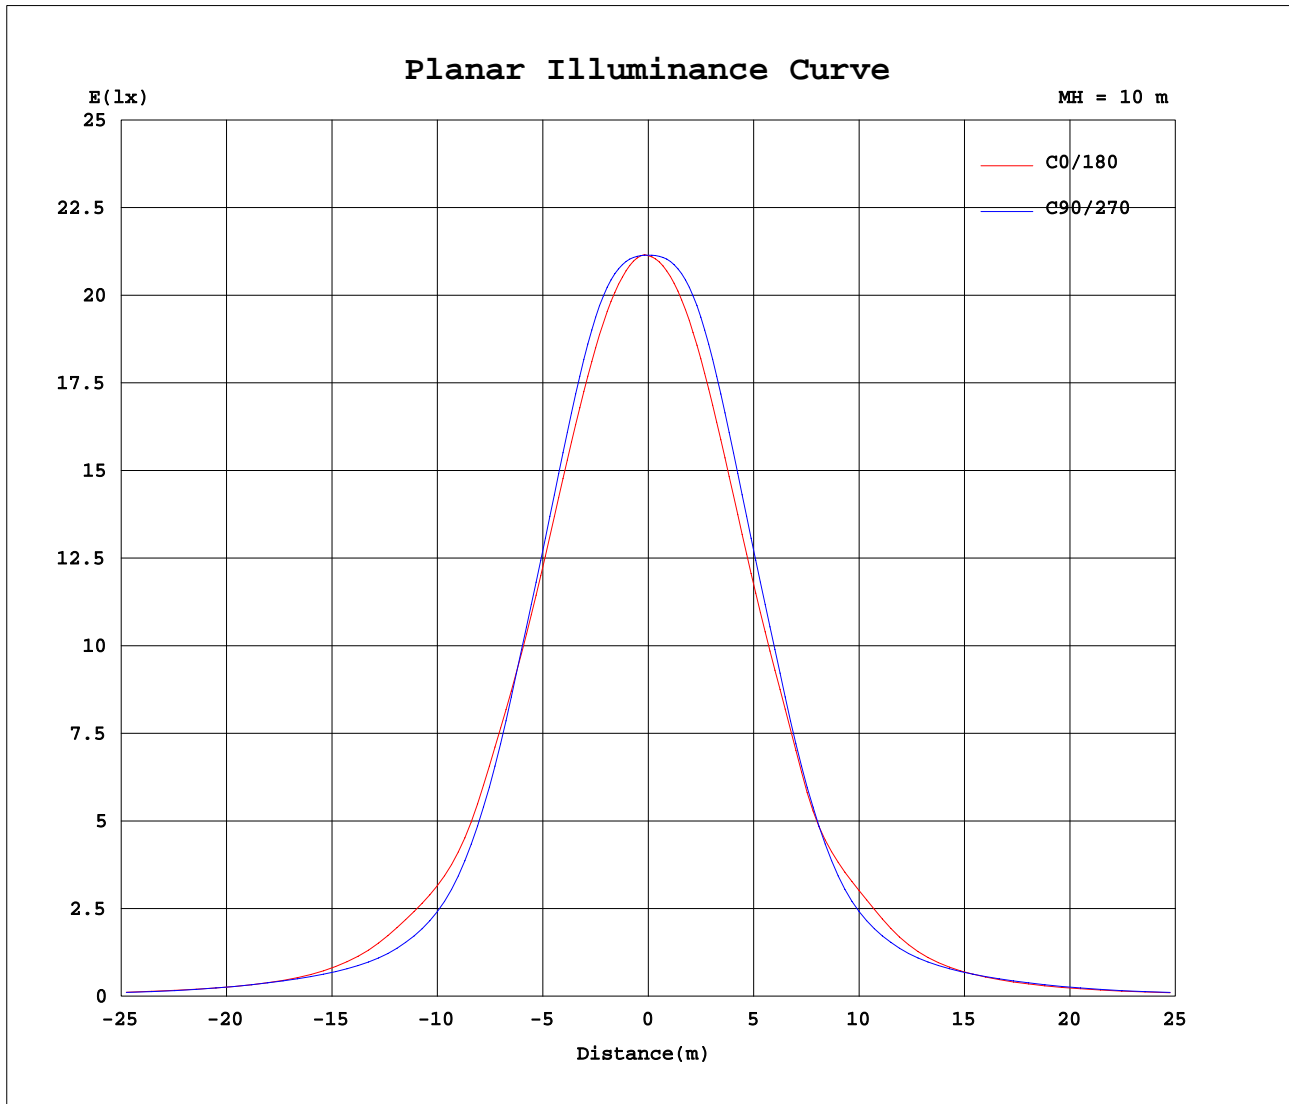

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LXF
 Test Date: 2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity: 25.0%
 Test Distance: 7.560m [K=0.9524]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Panel light	TYPE:LED	WEIGHT:
SPEC.:highbay	DIM.: 620*620	SERIAL No.:
MFR.: JT	SUR.:0.620*0.620	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2116	2116	2115	2115	2115	2114	2114	2113	2113	2113	2114	2114	2115	2115	2115	2116			
5	2109	2111	2118	2125	2127	2121	2111	2100	2094	2100	2111	2121	2127	2125	2118	2111			
10	2076	2083	2104	2130	2140	2126	2097	2068	2051	2068	2097	2126	2140	2130	2104	2083			
15	2010	2019	2054	2095	2110	2092	2044	1997	1972	1997	2044	2092	2110	2095	2054	2019			
20	1906	1910	1954	1999	2006	1987	1932	1874	1851	1874	1932	1987	2006	1999	1954	1910			
25	1763	1760	1802	1842	1840	1824	1774	1712	1696	1712	1774	1824	1840	1842	1802	1760			
30	1591	1580	1614	1643	1623	1620	1588	1530	1517	1530	1588	1620	1623	1643	1614	1580			
35	1392	1361	1366	1367	1310	1318	1309	1269	1277	1269	1309	1318	1310	1367	1366	1361			
40	1108	1071	1048	1066	967	987	978	946	992	946	978	987	967	1066	1048	1071			
45	893	767	771	844	684	777	756	689	853	689	756	777	684	844	771	767			
50	738	582	571	622	516	568	546	555	636	555	546	568	516	622	571	582			
55	523	475	438	439	417	425	412	424	442	424	412	425	417	439	438	475			
60	365	381	358	305	353	324	333	343	329	343	333	324	353	305	358	381			
65	268	291	305	217	262	255	252	298	238	298	252	255	262	217	305	291			
70	192	233	231	183	195	208	215	183	170	183	215	208	195	183	231	233			
75	139	167	164	160	150	145	139	127	152	127	139	145	150	160	164	167			
80	122	109	108	114	118	109	97.2	86.2	107	86.2	97.2	109	118	114	108	109			
85	63.6	63.2	66.2	64.6	61.7	64.3	40.4	40.7	37.5	40.7	40.4	64.3	61.7	64.6	66.2	63.2			
90	5.40	5.61	3.16	2.33	0.59	0.21	0.25	0.22	0.22	0.22	0.25	0.21	0.59	2.33	3.16	5.61			
95	0.22	0.25	0.23	0.23	0.32	0.22	0.23	0.25	0.22	0.25	0.23	0.22	0.32	0.23	0.23	0.25			
100	0.25	0.30	0.27	0.29	0.24	0.28	0.25	0.30	0.27	0.30	0.25	0.28	0.24	0.29	0.27	0.30			
105	0.33	0.37	0.34	0.36	0.32	0.35	0.32	0.37	0.34	0.37	0.32	0.35	0.32	0.36	0.34	0.37			
110	0.43	0.47	0.44	0.46	0.40	0.44	0.42	0.47	0.46	0.47	0.42	0.44	0.40	0.46	0.44	0.47			
115	0.56	0.59	0.57	0.59	0.53	0.56	0.55	0.59	0.59	0.59	0.55	0.56	0.53	0.59	0.57	0.59			
120	0.72	0.75	0.74	0.76	0.70	0.74	0.73	0.77	0.77	0.77	0.73	0.74	0.70	0.76	0.74	0.75			
125	0.91	0.95	0.94	0.95	0.91	0.94	0.92	0.97	0.96	0.97	0.92	0.94	0.91	0.95	0.94	0.95			
130	1.12	1.17	1.15	1.16	1.14	1.16	1.13	1.20	1.17	1.20	1.13	1.16	1.14	1.16	1.15	1.17			
135	1.34	1.40	1.37	1.39	1.37	1.39	1.36	1.42	1.38	1.42	1.36	1.39	1.37	1.39	1.37	1.40			
140	1.55	1.62	1.58	1.60	1.60	1.60	1.57	1.62	1.61	1.62	1.57	1.60	1.60	1.60	1.58	1.62			
145	1.79	1.84	1.81	1.83	1.83	1.83	1.80	1.86	1.85	1.86	1.80	1.83	1.83	1.83	1.81	1.84			
150	2.04	2.09	2.05	2.08	2.06	2.08	2.04	2.11	2.10	2.11	2.04	2.08	2.06	2.08	2.05	2.09			
155	2.30	2.35	2.31	2.33	2.31	2.34	2.32	2.37	2.38	2.37	2.32	2.34	2.31	2.33	2.31	2.35			
160	2.59	2.63	2.57	2.60	2.58	2.62	2.59	2.65	2.67	2.65	2.59	2.62	2.58	2.60	2.57	2.63			
165	2.83	2.87	2.81	2.85	2.82	2.86	2.83	2.92	2.91	2.92	2.83	2.86	2.82	2.85	2.81	2.87			
170	3.04	3.07	3.02	3.07	3.02	3.08	3.04	3.12	3.11	3.12	3.04	3.08	3.02	3.07	3.02	3.07			
175	3.20	3.21	3.18	3.21	3.17	3.22	3.20	3.25	3.24	3.25	3.20	3.22	3.17	3.21	3.18	3.21			
180	3.29	3.29	3.27	3.28	3.27	3.28	3.29	3.29	3.32	3.29	3.29	3.28	3.27	3.28	3.27	3.29			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9524]
 Remarks: