
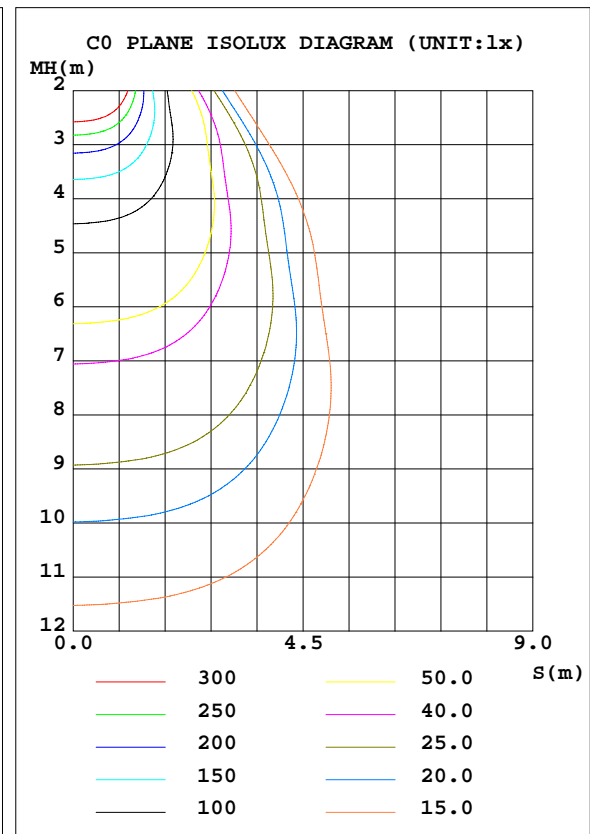


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.15 lm/W			
MODEL	47046362	Imax(cd)	2035	S/MH(C0/180)	1.18
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3793.8	η UP, DN(C0-180)	0.1,50.0
NOMINAL FLUX(lm)	3793.83	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,49.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.15

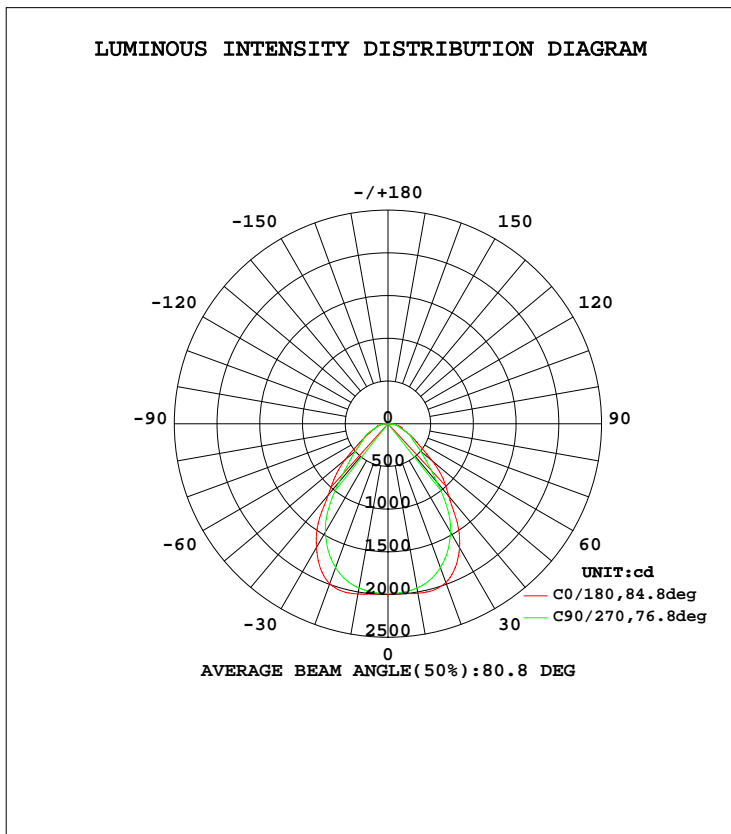

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φlum,lamp
10	2015	1975	1953	1991	2024	1991	1953	1975	0- 10	189.7	189.7	5,5
20	1977	1872	1792	1898	1994	1898	1792	1872	10- 20	551.5	741.2	19.5,19.5
30	1675	1560	1465	1570	1675	1570	1465	1560	20- 30	803.4	1545	40.7,40.7
40	1108	1035	893.8	965.7	1088	965.7	893.8	1035	30- 40	812.0	2357	62.1,62.1
50	679.3	564.8	498.8	533.3	657.9	533.3	498.8	564.8	40- 50	591.9	2948	77.7,77.7
60	349.1	324.1	317.6	339.6	310.7	339.6	317.6	324.1	50- 60	381.4	3330	87.8,87.8
70	181.8	213.6	168.4	194.2	165.2	194.2	168.4	213.6	60- 70	251.4	3581	94.4,94.4
80	113.5	97.70	98.61	96.52	103.7	96.52	98.61	97.70	70- 80	148.3	3730	98.3,98.3
90	0.2748	0.2925	0.2373	0.2585	0.2290	0.2585	0.2373	0.2925	80- 90	57.26	3787	99.8,99.8
100	0.2276	0.2568	0.2815	0.2813	0.2789	0.2813	0.2815	0.2568	90-100	0.5443	3787	99.8,99.8
110	0.3972	0.4348	0.4801	0.4634	0.4257	0.4634	0.4801	0.4348	100-110	0.3893	3788	99.8,99.8
120	0.6917	0.7781	0.8108	0.8035	0.7244	0.8035	0.8108	0.7781	110-120	0.6065	3788	99.9,99.9
130	1.125	1.226	1.233	1.255	1.180	1.255	1.233	1.226	120-130	0.8932	3789	99.9,99.9
140	1.615	1.677	1.697	1.690	1.669	1.690	1.697	1.677	130-140	1.125	3790	99.9,99.9
150	2.083	2.174	2.195	2.129	2.141	2.129	2.195	2.174	140-150	1.206	3792	99.9,99.9
160	2.605	2.688	2.688	2.601	2.647	2.601	2.688	2.688	150-160	1.113	3793	100,100
170	3.164	3.106	3.073	3.048	3.198	3.048	3.073	3.106	160-170	0.8171	3794	100,100
180	3.425	3.285	3.260	3.293	3.425	3.293	3.260	3.285	170-180	0.3069	3794	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.92	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.73	.84	.77	.72	.81	.76	.71	.78	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.51	.63	.56	.50	.62	.55	.50	.60	.54	.50	.59	.53	.49	.47
7.0	.59	.51	.46	.58	.51	.46	.57	.50	.45	.55	.49	.45	.54	.49	.45	.43
8.0	.54	.47	.41	.54	.46	.41	.53	.46	.41	.51	.45	.41	.50	.45	.41	.39
9.0	.50	.43	.38	.50	.43	.38	.49	.42	.38	.48	.42	.37	.47	.41	.37	.36
10.0	.47	.40	.35	.46	.39	.35	.45	.39	.35	.45	.39	.35	.44	.38	.34	.33

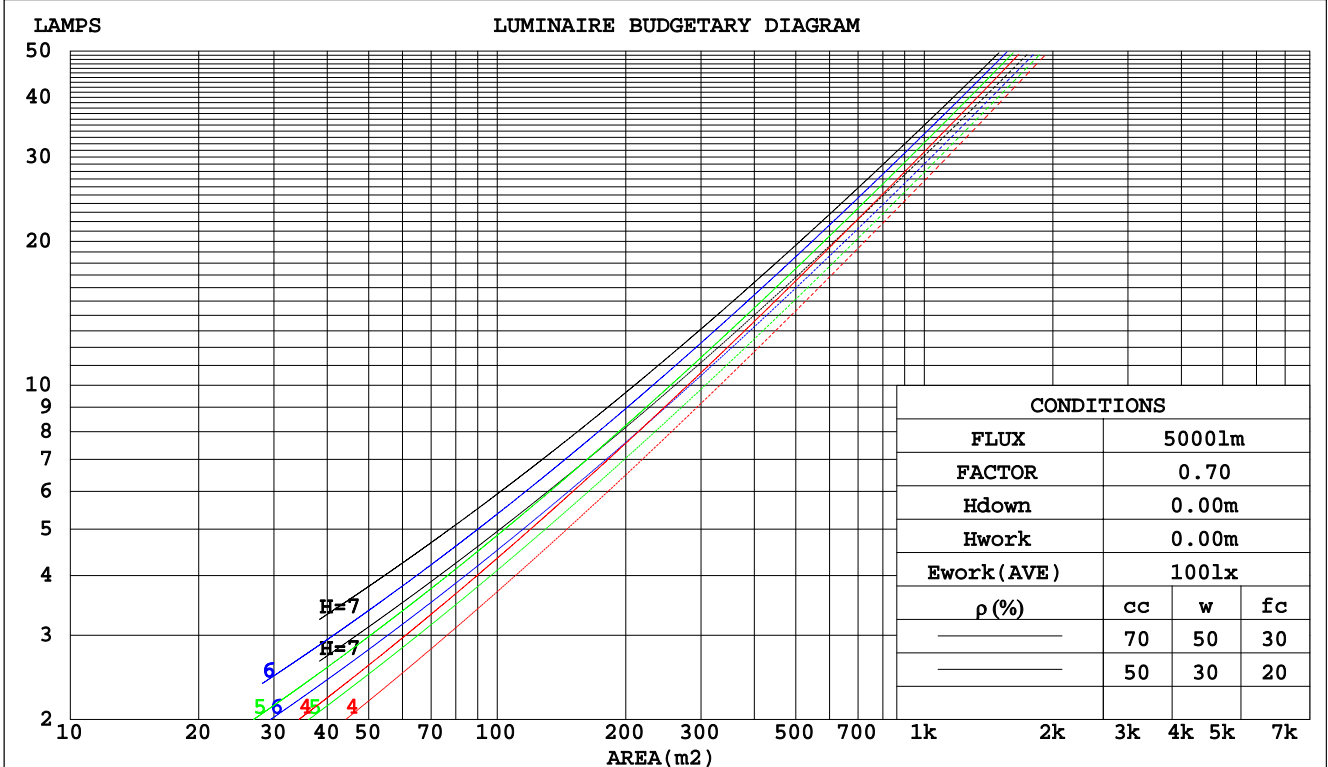

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

WEC AND CCEC

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.261	.149	.047	.254	.145	.046	.241	.138	.044	.229	.132	.042	.218	.126	.041	
2.0	.247	.135	.041	.241	.132	.041	.229	.127	.040	.219	.123	.038	.209	.118	.037	
3.0	.230	.123	.037	.225	.121	.036	.215	.117	.035	.206	.113	.035	.197	.109	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.193	.104	.031	.186	.101	.031	
5.0	.201	.102	.030	.197	.101	.029	.189	.098	.029	.182	.096	.029	.175	.094	.028	
6.0	.188	.094	.027	.185	.093	.027	.178	.091	.027	.171	.089	.026	.165	.087	.026	
7.0	.177	.088	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024	.156	.081	.024	
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022	
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.145	.073	.021	.141	.072	.021	
10.0	.149	.072	.020	.147	.071	.020	.142	.070	.020	.138	.069	.019	.134	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.178	.158	.140	.153	.136	.120	.104	.093	.083	.060	.054	.048	.019	.017	.016	
2.0	.168	.134	.105	.144	.115	.091	.098	.080	.063	.057	.046	.037	.018	.015	.012	
3.0	.158	.115	.081	.136	.100	.071	.093	.069	.049	.054	.040	.029	.017	.013	.010	
4.0	.150	.102	.065	.129	.088	.056	.088	.061	.040	.051	.036	.023	.016	.012	.008	
5.0	.142	.091	.053	.122	.079	.046	.084	.055	.033	.049	.032	.019	.016	.011	.006	
6.0	.135	.082	.044	.116	.071	.039	.080	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.129	.075	.038	.111	.065	.033	.076	.046	.023	.044	.027	.014	.014	.009	.005	
8.0	.123	.069	.033	.106	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.117	.064	.029	.101	.056	.025	.070	.039	.018	.041	.023	.011	.013	.008	.004	
10.0	.112	.060	.025	.096	.052	.022	.067	.037	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

UGR(Unified Glare Rating) Table

NAME:		TYPE:LED					WEIGHT:				
SPEC.:3012M		DIM.: 1195*295					SERIAL No.:				
MFR.: JT		SUR.:1.195*0.2958					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	15.1	16.4	15.3	16.6	16.8	14.4	15.7	14.6	15.9	16.1	
3H	15.9	17.1	16.2	17.3	17.6	15.3	16.5	15.6	16.7	16.9	
4H	16.3	17.5	16.6	17.7	18.0	15.7	16.8	16.0	17.1	17.3	
6H	16.8	17.9	17.1	18.2	18.4	16.1	17.2	16.4	17.4	17.7	
8H	17.0	18.1	17.3	18.3	18.6	16.3	17.4	16.7	17.7	17.9	
12H	17.1	18.1	17.5	18.4	18.7	16.5	17.5	16.9	17.8	18.1	
4H 2H	15.3	16.5	15.6	16.7	17.0	14.7	15.9	15.0	16.1	16.4	
3H	16.4	17.4	16.8	17.7	18.0	15.9	16.9	16.3	17.2	17.5	
4H	17.0	17.9	17.3	18.2	18.5	16.4	17.4	16.8	17.7	18.0	
6H	17.6	18.4	18.0	18.7	19.1	17.0	17.8	17.4	18.2	18.6	
8H	17.9	18.6	18.3	19.0	19.4	17.4	18.1	17.8	18.5	18.9	
12H	18.1	18.8	18.5	19.1	19.5	17.7	18.4	18.1	18.7	19.1	
8H 4H	17.2	17.9	17.6	18.3	18.7	16.7	17.4	17.1	17.8	18.2	
6H	17.9	18.5	18.4	18.9	19.4	17.5	18.1	17.9	18.5	18.9	
8H	18.3	18.9	18.8	19.3	19.7	18.0	18.5	18.4	19.0	19.4	
12H	18.6	19.1	19.1	19.5	20.0	18.4	18.9	18.9	19.3	19.8	
12H 4H	17.2	17.9	17.6	18.2	18.6	16.7	17.4	17.1	17.8	18.2	
6H	18.0	18.5	18.5	19.0	19.4	17.6	18.1	18.0	18.6	19.0	
8H	18.4	18.9	18.9	19.4	19.8	18.1	18.6	18.6	19.1	19.5	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5					
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4					
2.0H	+ 0.9 / - 0.5					+ 0.5 / - 0.4					

CIE Pub.117 Corrected 3794 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.6)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

UTILIZATION FACTORS TABLE

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	58	52	47
0.80	77	68	62	77	67	62	75	67	61	56
1.00	85	76	70	84	75	69	82	76	69	63
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	100	93	88	98	92	87	95	90	86	79
2.50	103	97	92	101	96	91	98	93	89	82
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	109	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

ISOCANDELA DIAGRAM


NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

Conical surface Flux(90deg):

2681 lm
 %lum = 70.7%
 %lamp = 70.7%

Conical surface Flux(120deg):

3329.9 lm
 %lum = 87.8%
 %lamp = 87.8%

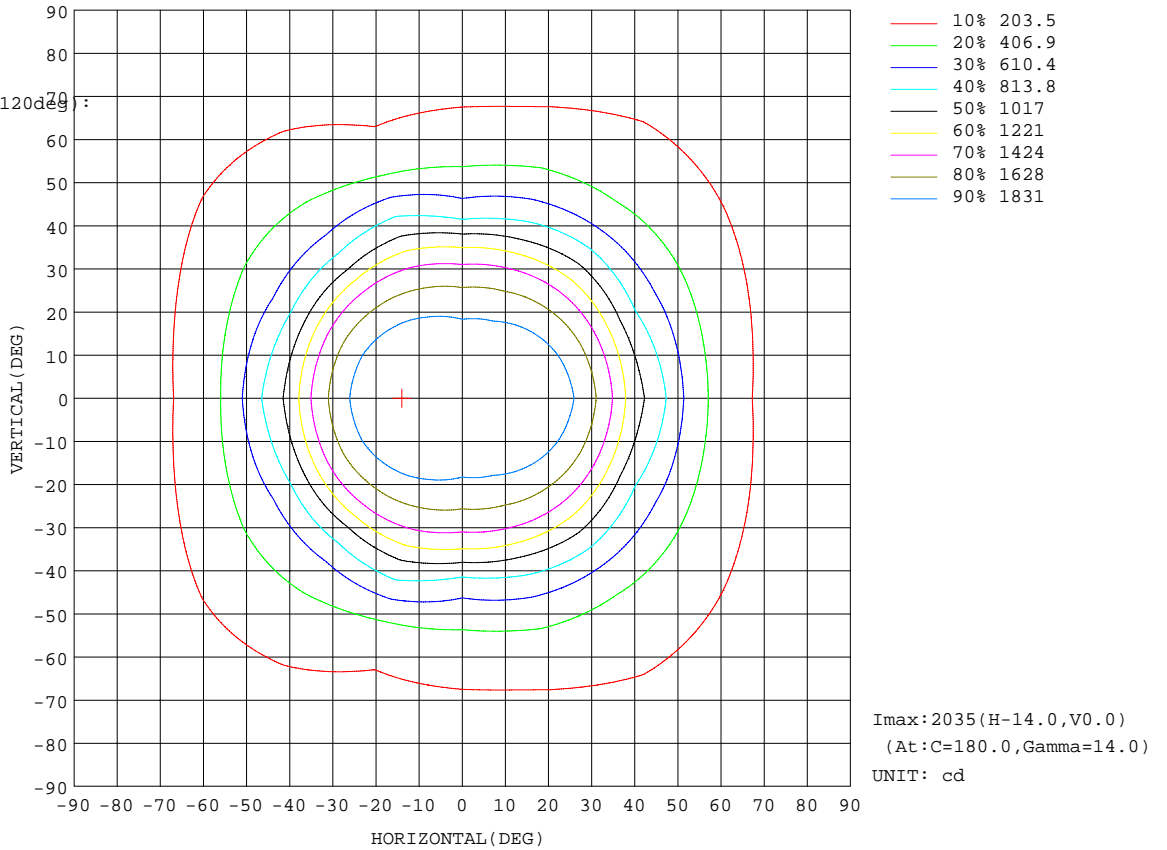


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LXF
 Test Date: 2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity: 25.0%
 Test Distance: 7.560m [K=0.9590]
 Remarks:

AAI Figure

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

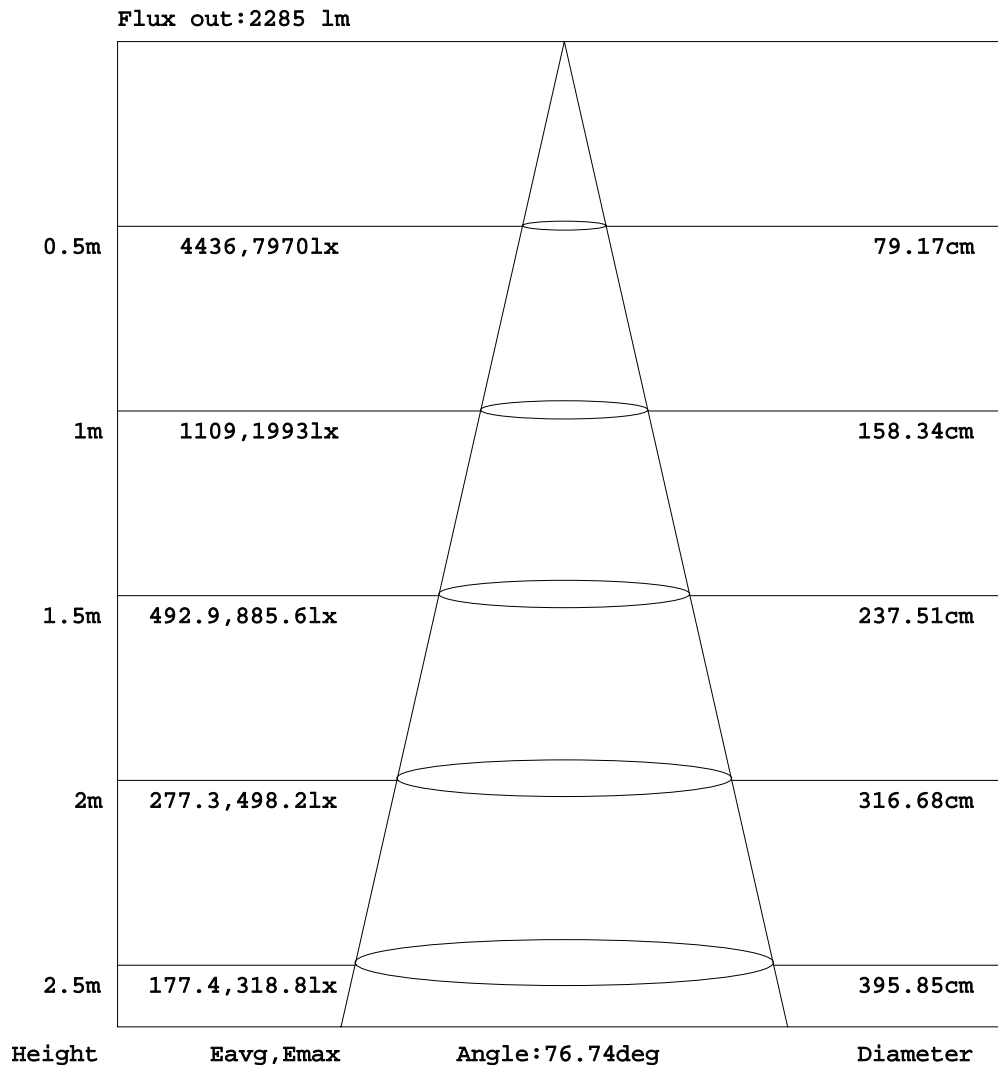


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

ISOLUX DIAGRAM

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

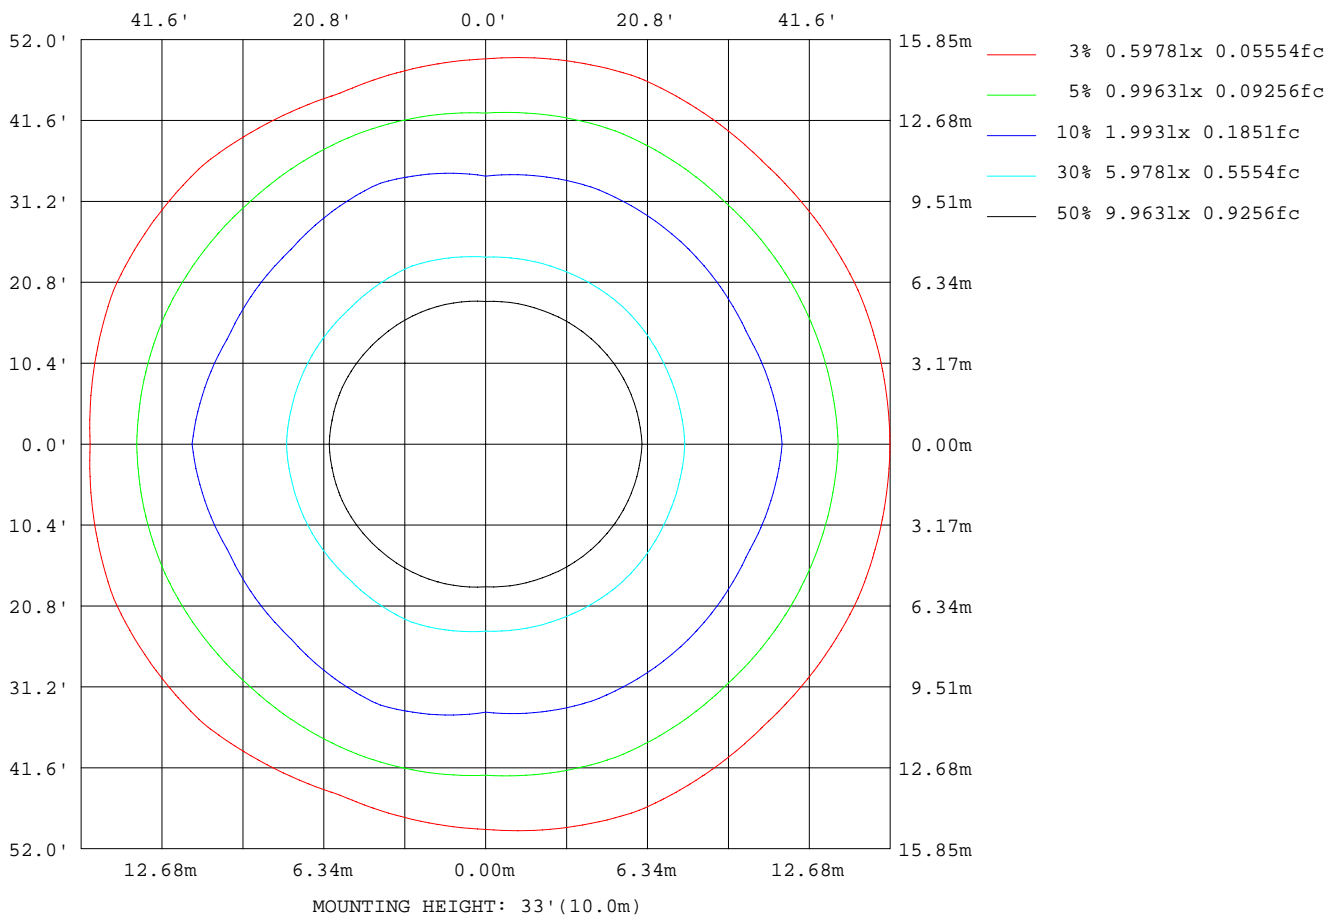

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks:

LED Avg.L Report

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1607
L_0~180(75)av	1639
L_0~180(85)av	1732
L_90~270(65)av	1710
L_90~270(75)av	1432
L_90~270(85)av	1768
L_45(65)av	1753
L_45(75)av	1547
L_45(85)av	1795

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LXF
Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
Humidity:25.0%
Test Distance:7.560m [K=0.9590]
Remarks:

Planar Illuminance Curve

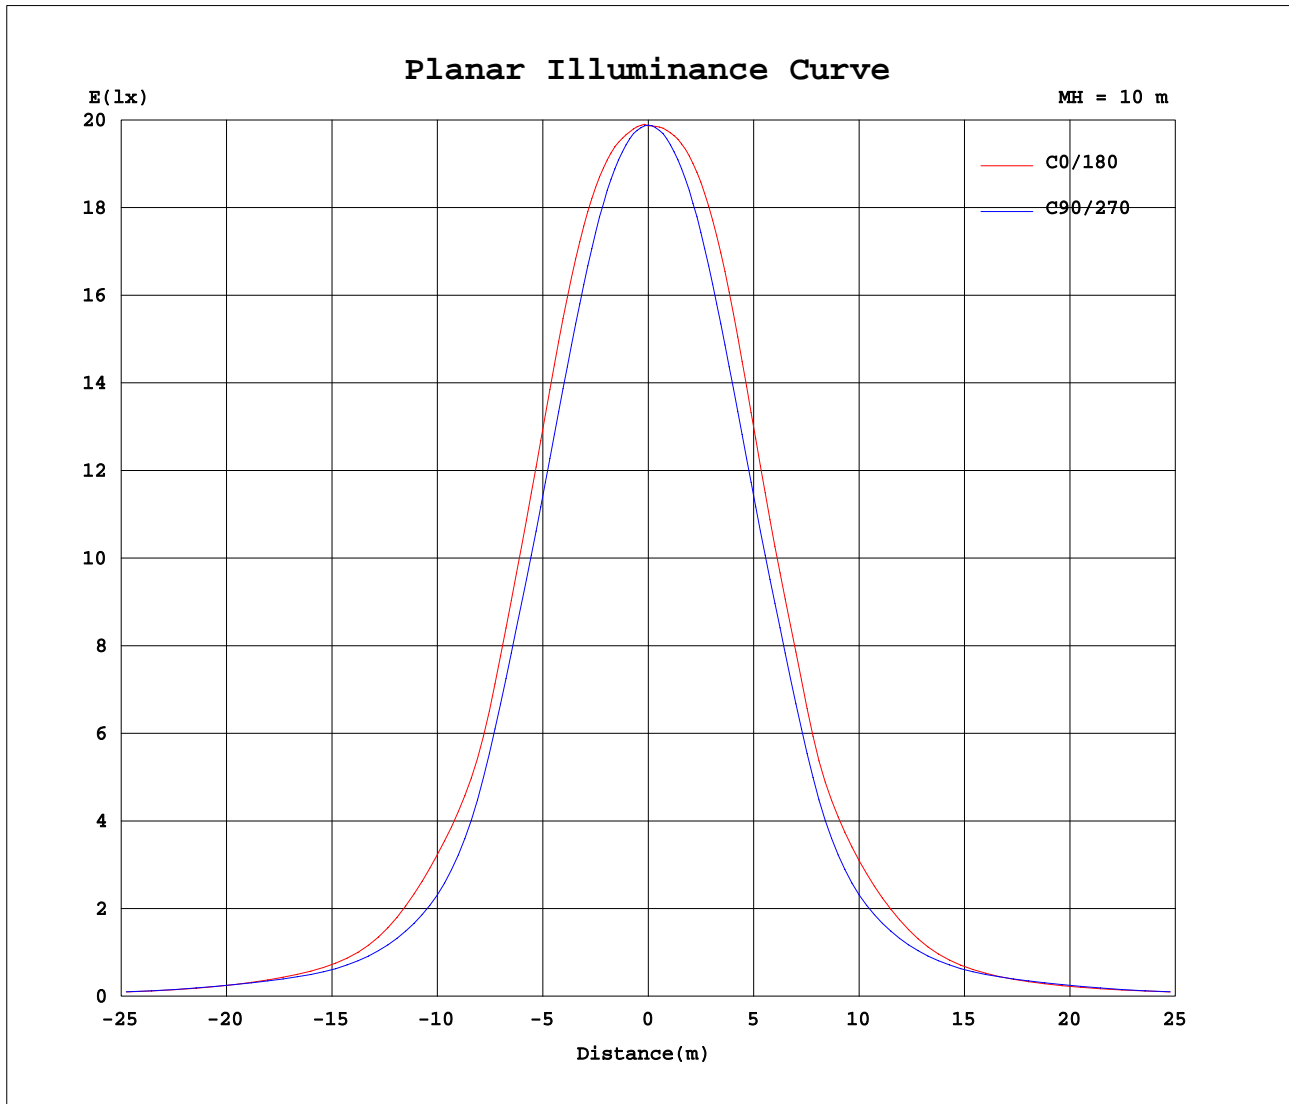

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LXF
 Test Date: 2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity: 25.0%
 Test Distance: 7.560m [K=0.9590]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:LED	WEIGHT:
SPEC.:3012M	DIM.: 1195*295	SERIAL No.:
MFR.: JT	SUR.:1.195*0.2958	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1993	1991	1990	1989	1988	1987	1988	1986	1987	1986	1988	1987	1988	1989	1990	1991			
5	1996	1991	1986	1981	1980	1983	1990	1996	1999	1996	1990	1983	1980	1981	1986	1991			
10	2015	1999	1975	1956	1953	1967	1991	2015	2024	2015	1991	1967	1953	1956	1975	1999			
15	2020	1991	1945	1905	1893	1925	1969	2014	2033	2014	1969	1925	1893	1905	1945	1991			
20	1977	1932	1872	1814	1792	1838	1898	1962	1994	1962	1898	1838	1792	1814	1872	1932			
25	1860	1809	1742	1679	1649	1698	1762	1832	1871	1832	1762	1698	1649	1679	1742	1809			
30	1675	1625	1560	1501	1465	1519	1570	1638	1675	1638	1570	1519	1465	1501	1560	1625			
35	1414	1359	1311	1258	1215	1293	1311	1375	1430	1375	1311	1293	1215	1258	1311	1359			
40	1108	1031	1035	957	894	1006	966	1022	1088	1022	966	1006	894	957	1035	1031			
45	915	779	784	742	655	786	727	753	876	753	727	786	655	742	784	779			
50	679	599	565	547	499	556	533	562	658	562	533	556	499	547	565	599			
55	462	441	415	417	380	374	415	444	439	444	415	374	380	417	415	441			
60	349	368	324	334	318	268	340	341	311	341	340	268	318	334	324	368			
65	244	301	247	251	253	200	271	263	231	263	271	200	253	251	247	301			
70	182	196	214	196	168	158	194	204	165	204	194	158	168	196	214	196			
75	160	132	141	129	130	137	139	145	137	145	139	137	130	129	141	132			
80	113	94.2	97.7	103	98.6	108	96.5	103	104	103	96.5	108	98.6	103	97.7	94.2			
85	51.4	52.7	51.7	62.8	53.9	53.1	57.8	61.5	54.3	61.5	57.8	53.1	53.9	62.8	51.7	52.7			
90	0.27	3.06	0.29	0.22	0.24	0.23	0.26	9.86	0.23	9.86	0.26	0.23	0.24	0.22	0.29	3.06			
95	0.21	0.23	0.23	0.25	0.24	0.25	0.25	0.24	0.25	0.24	0.25	0.25	0.24	0.25	0.23	0.23			
100	0.23	0.28	0.26	0.31	0.28	0.32	0.28	0.30	0.28	0.30	0.28	0.32	0.28	0.31	0.26	0.28			
105	0.30	0.35	0.34	0.40	0.37	0.40	0.36	0.38	0.32	0.38	0.36	0.40	0.37	0.40	0.34	0.35			
110	0.40	0.45	0.43	0.51	0.48	0.51	0.46	0.48	0.43	0.48	0.46	0.51	0.48	0.51	0.43	0.45			
115	0.52	0.57	0.58	0.65	0.62	0.66	0.61	0.60	0.55	0.60	0.61	0.66	0.62	0.65	0.58	0.57			
120	0.69	0.73	0.78	0.83	0.81	0.85	0.80	0.78	0.72	0.78	0.80	0.85	0.81	0.83	0.78	0.73			
125	0.89	0.95	0.99	1.03	1.02	1.04	1.01	1.00	0.94	1.00	1.01	1.04	1.02	1.03	0.99	0.95			
130	1.12	1.19	1.23	1.25	1.23	1.26	1.25	1.25	1.18	1.25	1.25	1.26	1.23	1.25	1.23	1.19			
135	1.38	1.46	1.44	1.47	1.45	1.46	1.47	1.49	1.42	1.49	1.47	1.46	1.45	1.47	1.44	1.46			
140	1.62	1.71	1.68	1.71	1.70	1.69	1.69	1.74	1.67	1.74	1.69	1.69	1.70	1.71	1.68	1.71			
145	1.85	1.95	1.92	1.96	1.95	1.92	1.91	1.95	1.91	1.95	1.91	1.92	1.95	1.96	1.92	1.95			
150	2.08	2.19	2.17	2.22	2.19	2.17	2.13	2.16	2.14	2.16	2.13	2.17	2.19	2.22	2.17	2.19			
155	2.32	2.47	2.43	2.48	2.46	2.43	2.36	2.37	2.38	2.37	2.36	2.43	2.46	2.48	2.43	2.47			
160	2.61	2.75	2.69	2.73	2.69	2.69	2.60	2.62	2.65	2.62	2.60	2.69	2.69	2.73	2.69	2.75			
165	2.89	3.02	2.92	2.93	2.90	2.92	2.84	2.87	2.93	2.87	2.84	2.92	2.90	2.93	2.92	3.02			
170	3.16	3.22	3.11	3.10	3.07	3.10	3.05	3.12	3.20	3.12	3.05	3.10	3.07	3.10	3.11	3.22			
175	3.35	3.36	3.23	3.21	3.20	3.23	3.21	3.31	3.36	3.31	3.21	3.23	3.20	3.21	3.23	3.36			
180	3.43	3.39	3.28	3.27	3.26	3.26	3.29	3.38	3.43	3.38	3.29	3.26	3.26	3.27	3.28	3.39			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LXF
 Test Date:2021-04-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295
 Humidity:25.0%
 Test Distance:7.560m [K=0.9590]
 Remarks: